



ARCHITECTURE LIGHTING CATALOG 2025

IrisLuce s.r.l.
green solar light technology design

IRIS LUCE s.r.l.

Viale Della Rimembranza 7/3 | 30030 Salzano (VE) Italy

Registro Imprese VE N. 347840 C.F. e P.I. IT03666030261

Tel. +39 041 88 78 177 | +39 345 81 77 632

Email. info@italianlightstore.com | italianlightstore@gmail.com

www.italianlightstore.com





18717

220 ~ 240V-60W COB Ra $\geq$ 80 5100Lm(3000K)



Class I




IP67



kg 3.60





>5Nm

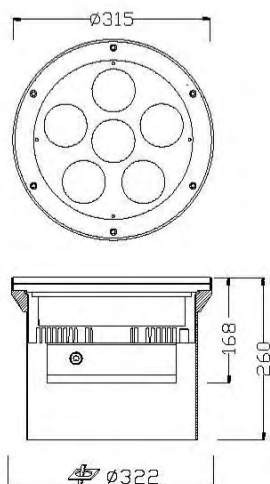

Stainless steel face ring .15mm super white glass.High-pressure casting aluminium lighting body . ABS plastic housing .



17937



kg 5.38

17917 17927 17937

220 ~ 240V-30W COB $Ra \geq 80$ 2550Lm(3000K)

220 ~ 240V-38W COB $Ra \geq 80$ 3230Lm(3000K)


Class I IP67 >5Nm



Stainless Steel 304 (Optional 316) face ring .High-pressure casting aluminium lighting body .ABS plastic housing .




17917



kg 5.25



17927



kg 5.53



17930



kg 4.73

17910 17920 17930

220 ~ 240V-30W COB Ra $\geq$ 80 2550Lm(3000K)

220 ~ 240V-38W COB Ra $\geq$ 80 3230Lm(3000K)

Class I

IP67


>5Nm



Stainless Steel 304 (Optional 316) face ring .High-pressure casting aluminium lighting body .ABS plastic housing .




17910



kg 4.6


17920



kg 4.85



17639



kg 2.91

17619 17629 17639

220 ~ 240V-22W COB $Ra \geq 80$ 1870Lm (3000K)


Class I IP67 $>5Nm$



Stainless Steel 304 (Optional 316) face ring .High-pressure casting aluminium lighting body .ABS plastic housing .




17619



kg 2.86



17629



kg 2.96



17631



kg 3.31

17611 17621 17631

220 ~ 240V-22W COB $Ra \geq 80$ 1870Lm (3000K)


Class I IP67 $>5Nm$



Stainless Steel 304 (Optional 316) face ring .High-pressure casting aluminium lighting body .ABS plastic housing .




17611



kg 3.35


17621



kg 3.45



14619



14619 14629


220 ~ 240V-15W COB $Ra \geq 80$ 1275Lm(3000K)

Class I IP67 $>5Nm$ 1.73 1.65



Stainless Steel 304 (Optional 316) face ring .High-pressure casting aluminium lighting body .ABS plastic housing .

14629




14619



14629





13129

220 ~ 240V-5W 5050LED $Ra \geq 80$ 355Lm(3000K)

220 ~ 240V-9W COB $Ra \geq 80$ 660Lm(3000K)



Class I IP67 $>5Nm$ kg 0.72



Stainless Steel 304 (Optional 316) face ring .High-pressure casting aluminium lighting body .ABS plastic housing .



18536



18536

220 ~ 240V-30W COB $Ra \geq 80$ 2550Lm (3000K)

Class I IP67 $>5Nm$ 4.45kg


17236

220 ~ 240V-22W COB $Ra \geq 80$ 1870Lm (3000K)


Class I IP67 $>5Nm$ 2.9kg



Stainless Steel 304 (Optional 316) face ring .PC lens.High-pressure casting aluminium lighting body .ABS plastic housing .






18536





17236

17236



18537



18537

220 ~ 240V-30W COB $Ra \geq 80$ 2550Lm(3000K)

Class I IP67 $>5Nm$ 4.45kg

17237

220 ~ 240V-22W COB $Ra \geq 80$ 1870Lm(3000K)

Class I IP67 $>5Nm$ 2.9kg



Stainless Steel 304 (Optional 316) face ring . PC lens. High-pressure casting aluminium lighting body . ABS plastic housing .






18537




17237

17237

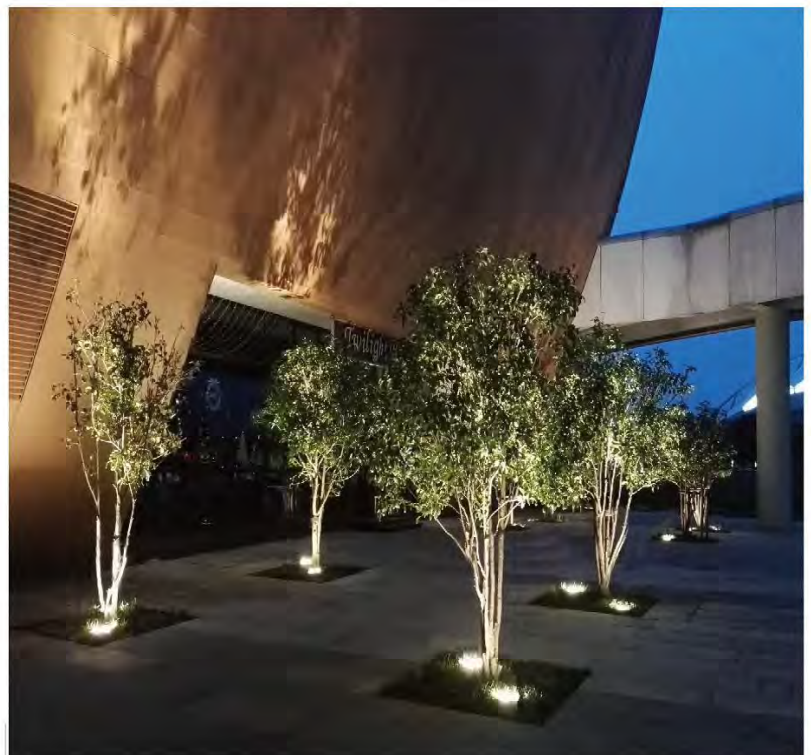

12066



12066

220 ~ 240V-15W COB $Ra \geq 80$ 1275Lm (3000K)

Class I IP67 $>5Nm$ 1.85kg

11916



220 ~ 240V-12W COB $Ra \geq 80$ 1020Lm (3000K)

Class I IP67 $>5Nm$ 1.45kg



Stainless Steel 304 (Optional 316) face ring . PC lens. High-pressure casting aluminium lighting body . ABS plastic housing .

11916




12066



11916



12067



12067

220 ~ 240V-15W COB $Ra \geq 80$ 1275Lm (3000K)

Class I IP67 $>5Nm$ 1.85 kg

11917


220 ~ 240V-12W COB $Ra \geq 80$ 1020Lm (3000K)

Class I IP67 $>5Nm$ 1.45 kg



Stainless Steel 304 (Optional 316) face ring . PC lens . High-pressure casting aluminium lighting body . ABS plastic housing .


11917




12067



11917

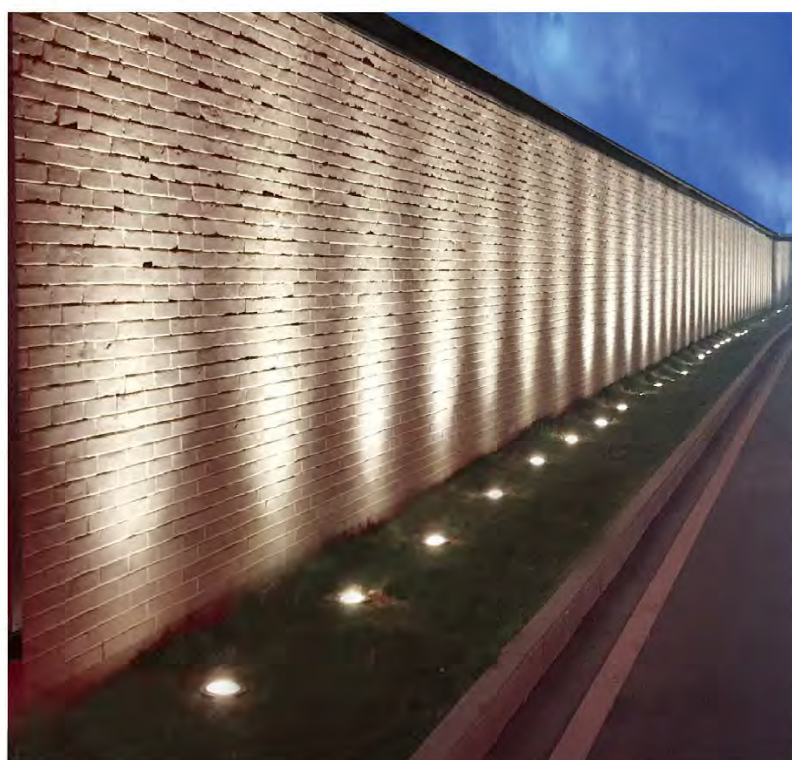

11827



11827

220 ~ 240V-9W COB Ra $\geq$ 80 765Lm(3000K)

Class I IP67 >5Nm 1.00 kg

11707


220 ~ 240V-6W COB Ra $\geq$ 80 510Lm(3000K)

Class I IP67 >5Nm 0.48 kg



Stainless Steel 304 (Optional 316) face ring .PC lens.High-pressure casting aluminium lighting body .ABS plastic housing .

11707




11827



11707





10218 10228

220 ~ 240V-5W Ra $\geq$ 80 425Lm(3000K)

Class I IP67 kg 0.6/0.45 $>2.5\text{Nm}$



10218 Stainless steel face ring stainless or 10228 Aluminium .ABS plastic Housing .




10218
stainless steel)



10228
(uminium)





10217 10227

24VDC-3W $Ra \geq 80$ 260Lm (3000K)

Class III IP67 kg 0.5/0.4 $>2.5Nm$




10217 Stainless steel face ring stainless or 10227 Aluminium .
ABS plastic Housing .





10217
stainless steel)



10227
(Aluminium)

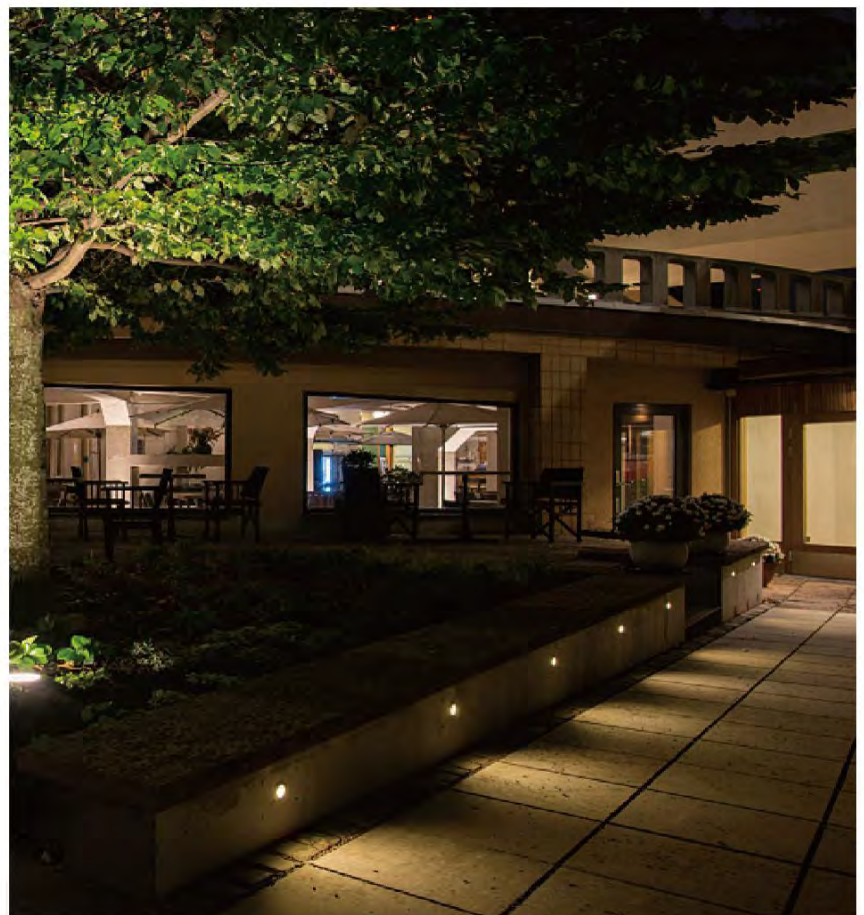

10018



10018 10028 10038 10058

220 ~ 240V-3W LED $Ra \geq 80$ 180Lm (3000K)

Class I IP67 $>5Nm$ kg 0.46

12~24VDC-3W LED $Ra \geq 80$ 180Lm (3000K)

Class III IP67 $>5Nm$ kg 0.46



Stainless steel face ring and lighting body. ABS plastic housing .


10028



10038



10058





10118

12~24VDC-3W Ra≥80 180Lm(3000K)



Class III IP67 0.45 >2.5Nm



10418

12~24VDC-1W Ra≥80 65Lm(3000K)

Class III IP67 0.28 >2.5Nm




10118 Optional beam angles: 8°、15°、30°、60°. 10418 Optional beam angles: 30°、60°. Stainless steel face ring and lighting body .PVC plastic housing .




10118



10418

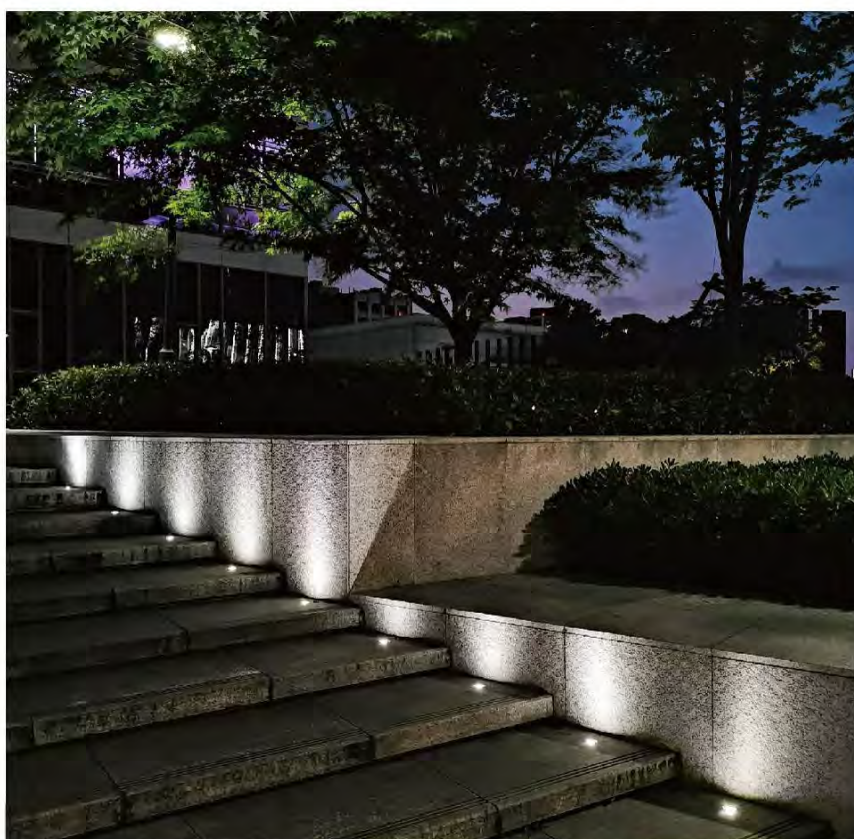

11208

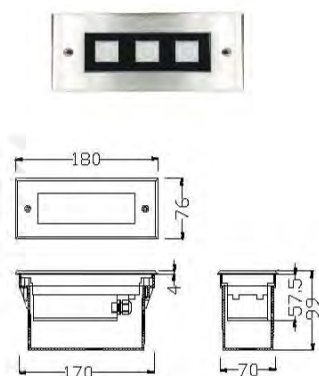

11208

220 ~ 240V-6W Ra $\geq$ 80 450Lm(3000K)


Class I IP67 kg 0.8 >2.5Nm

13208

220 ~ 240V-9W Ra $\geq$ 80 720Lm(3000K)

Class I IP67 kg 1.22 >2.5Nm

13208

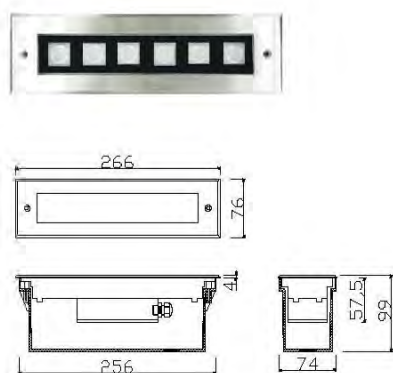


19588


220 ~ 240V-5W Ra $\geq$ 80 408Lm(3000K)

Class I IP67 kg 0.73 >2.5Nm




Optional beam angles: 20°、40°、8°、15°、30°、60°. Stainless steel face ring. High-pressure casting aluminium lighting body. ABS plastic housing.

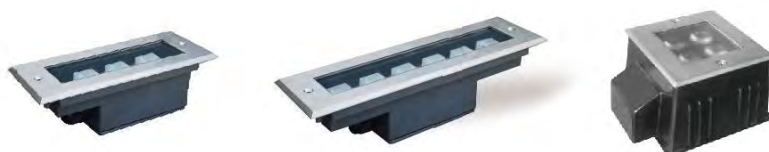

19588

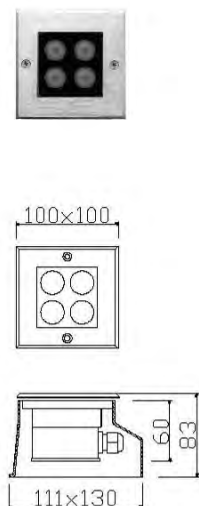

16287



16287 16697

220 ~ 240V-45W COB $R_a \geq 80$ 3825Lm (3000K)



Class I



IP67



kg

4.00







>5Nm



Stainless steel face ring .High-pressure casting aluminium lighting body
ABS plastic housing .

16697




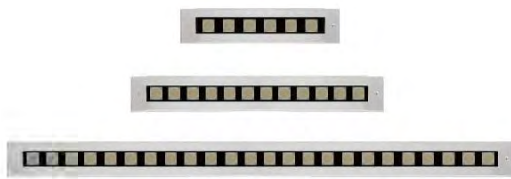

15217

24VDC-6W 6*1W $Ra \geq 80$ 576Lm(3000K)


Class III IP67 kg 1.01 >3Nm 0 24V



15227

24VDC-12W 12*1W $Ra \geq 80$ 1200Lm(3000K)


Class III IP67 kg 2.2 >3Nm 0 24V




15237


24VDC-24W 24*1W $Ra \geq 80$ 1920Lm(3000K)

Class III IP67 kg 3.12 >3Nm 0 24V

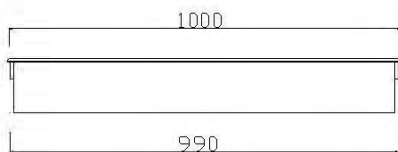

Optional beam angles: 20°/40°. Stainless steel face ring. Aluminium alloy lighting body. Aluminium profile housing. Compatible with 0-24V constant voltage dimming. 0 24V

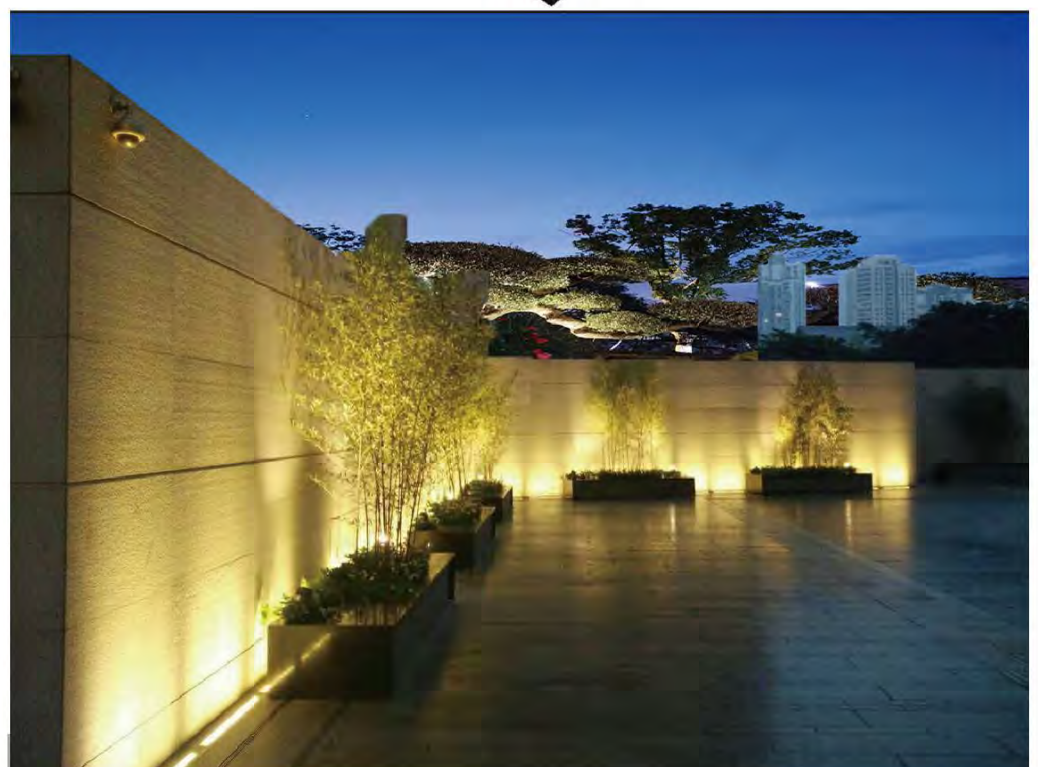


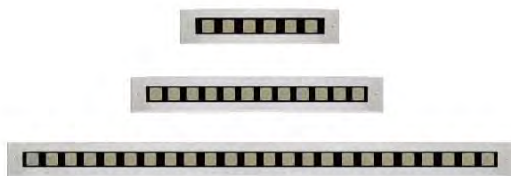

15218

220 ~ 240V-7.2W 6*1W Ra≥80 576Lm(3000K)


Class I IP67 kg 1.25 >3Nm



15228

220 ~ 240-15W 12*1W Ra≥80 1200Lm(3000K)


Class I IP67 kg 2.45 >3Nm



15238

220 ~ 240-28W 24*1W Ra≥80 1920Lm(3000K)

Class I IP67 kg 3.35 >3Nm

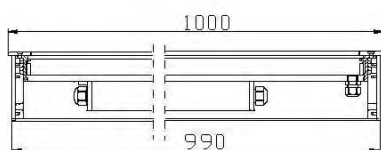

Optional beam angles:20*40°.Stainless steel face ring .Aluminium alloy lighting body . Aluminium profile housing .





15408

220 ~ 240V-7.2W 6*1W Ra $\geq$ 80 576Lm(3000K)

220 ~ 240V-14.5W 6*2W Ra $\geq$ 80 960Lm(3000K)


 Class I
  IP67
  2.1 kg
  >3Nm

15438


220 ~ 240V-28W 24*1W Ra $\geq$ 80 2240Lm(3000K)


220 ~ 240V-43W 24*1.5W Ra $\geq$ 80 3380Lm(3000K)

 Class I
  IP67
  6.02 kg
  >3Nm

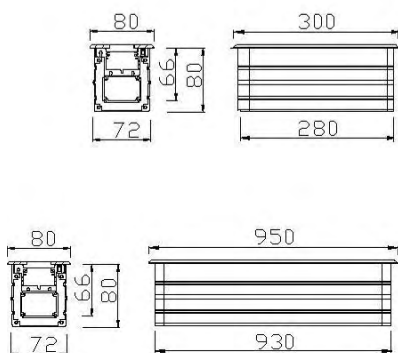

Optional beam angles: 5°、8°、15°、30°、60°. Stainless steel face ring.
Aluminium alloy lighting body. Aluminium profile housing.

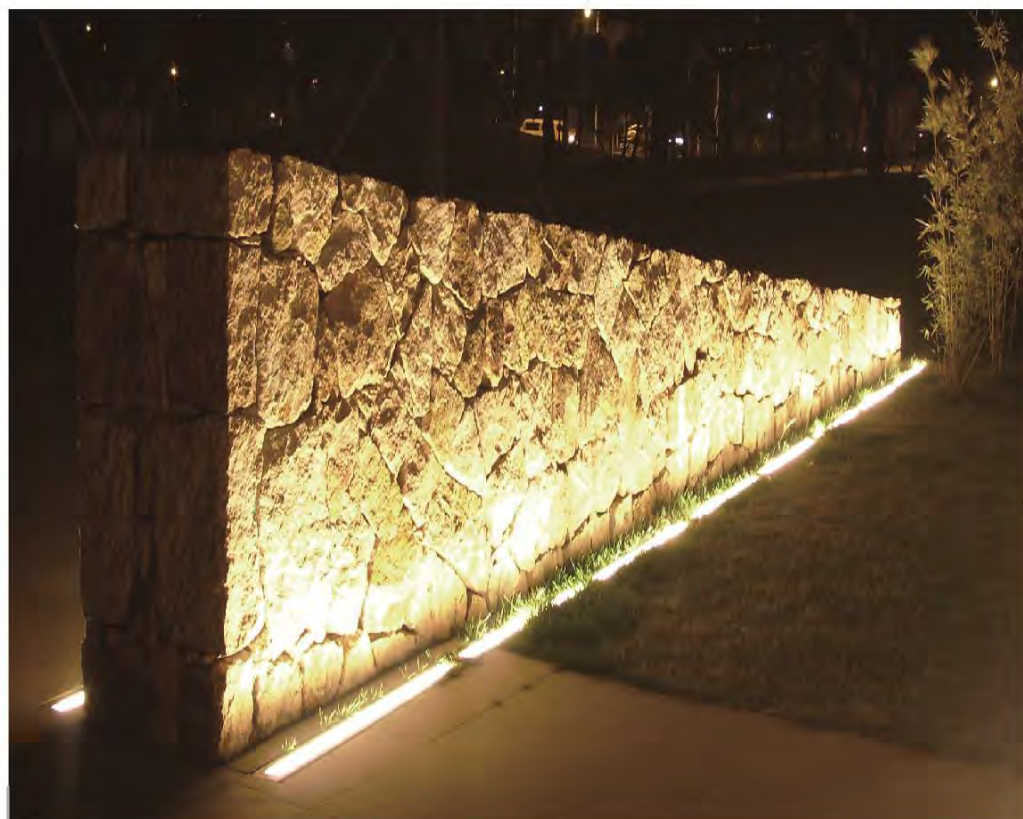

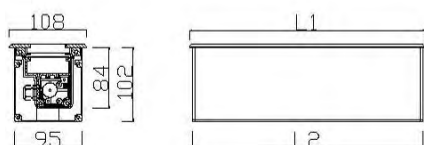

15808 (L1-305 mm / L2-288 mm)

220 ~ 240V-14W 12*1W $Ra \geq 80$ 1190Lm(3000K)

220 ~ 240V-7.2W 6*1W $Ra \geq 80$ 612 Lm(3000K)

Class I IP67 3.01 kg >5Nm

15818 (L1-420 mm / L2-414 mm)

220 ~ 240V-22W 18*1W $Ra \geq 80$ 1870Lm(3000K)

220 ~ 240V-11W 9*1W $Ra \geq 80$ 935 Lm(3000K)

Class I IP67 4.06 kg >5Nm

15828 (L1-650 mm / L2-640 mm)

220 ~ 240V-36W 30*1W $Ra \geq 80$ 3060Lm(3000K)

220 ~ 240V-18W 15*1W $Ra \geq 80$ 1530Lm(3000K)

Class I IP67 5.90 kg >5Nm

15838 (L1-950 mm / L2-940 mm)


220 ~ 240V-58W 48*1W $Ra \geq 80$ 4930Lm(3000K)



220 ~ 240V-29W 24*1W $Ra \geq 80$ 2465Lm(3000K)

Class I IP67 8.56 kg >5Nm



Square stripe lens angles:20x40°.Stainless steel face ring .Aluminium alloy lighting body . Aluminium profile housing .

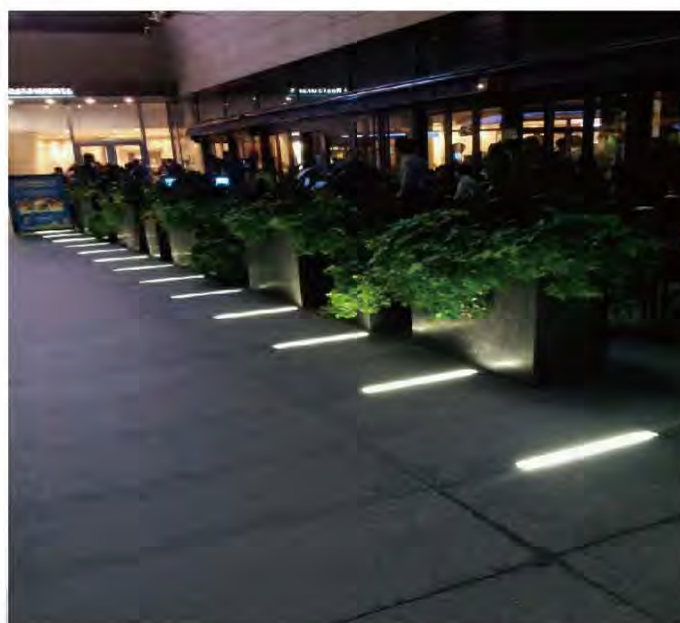

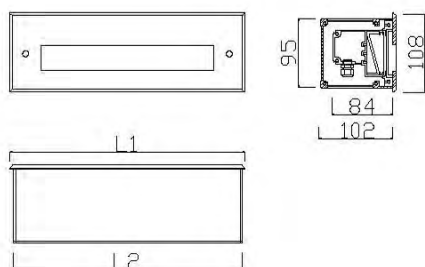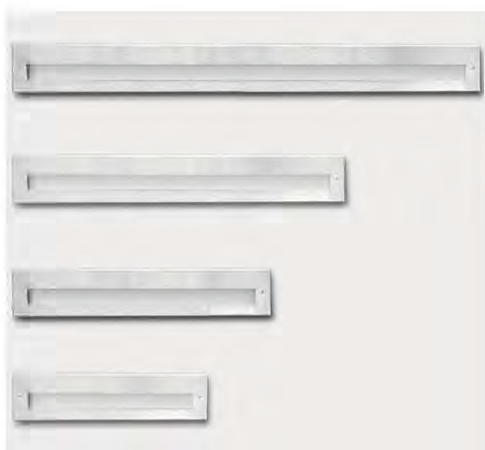

15800 (L1-305 mm / L2-288 mm)

220 ~ 240V-7.6W 6*1W $Ra \geq 80$ 468Lm(3000K)

Class I IP67 3.12 kg >5Nm

15810 (L1-420 mm / L2-414 mm)

220 ~ 240V-11W 9*1W $Ra \geq 80$ 585Lm(3000K)

Class I IP67 4.17 kg >5Nm

15820 (L1-650 mm / L2-639 mm)

220 ~ 240V-18W 15*1W $Ra \geq 80$ 975Lm(3000K)

Class I IP67 6.01 kg >5Nm


15830 (L1-950 mm / L2-939 mm)

220 ~ 240V-29W 24*1W $Ra \geq 80$ 1885Lm(3000K)


Class I IP67 7.24 kg >5Nm



Stainless steel face ring . Aluminium alloy lighting body . Aluminium profile housing .

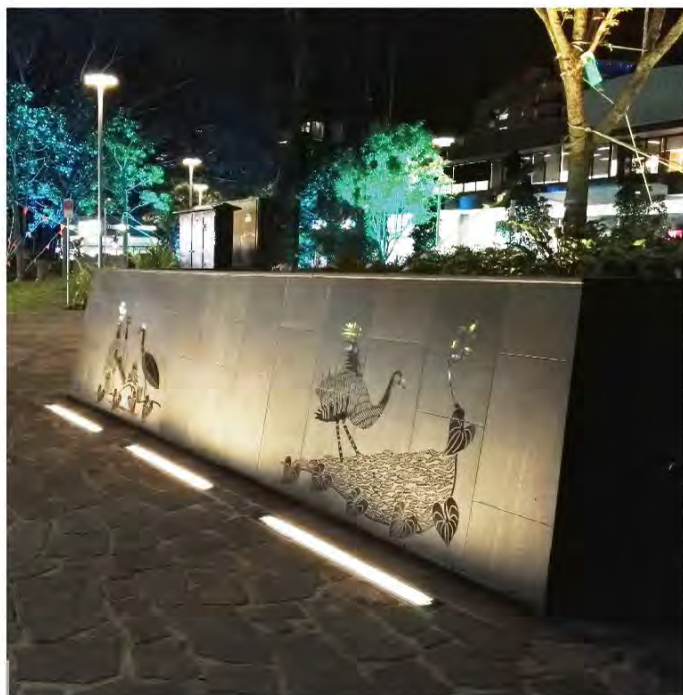

17248



kg 2.11

17248

(Single-Window Cover)


220 ~ 240V-5.7W 4*1W $Ra \geq 80$ 110Lm(3000K)

17258

(Double-Windows Cover)

220 ~ 240V-7.6W 6*1W $Ra \geq 80$ 165Lm(3000K)

17258



kg 2.16



Class I




IP67



>3Nm

High-pressure casting aluminium face ring and lighting body . Convex PC cover . ABS plastic housing .


17268




kg 2.10



19158



19168



19158

220 ~ 240V-5W 2*2W Ra≥80 96Lm(3000K)

Class I IP67 kg 2.55 >5Nm





19168

220 ~ 240V-10W 4*2W Ra≥80 192Lm(3000K)


Class I IP67 kg 2.40 >5Nm




Stainless steel cover .Convex PC cover .High-pressure casting aluminum lighting body . ABS plastic housing .

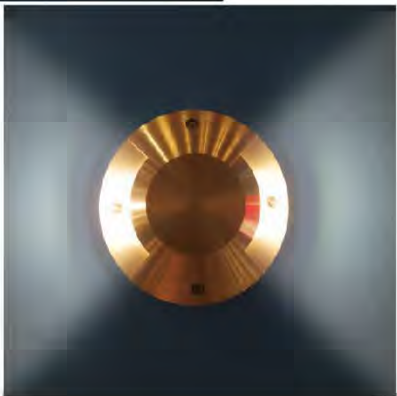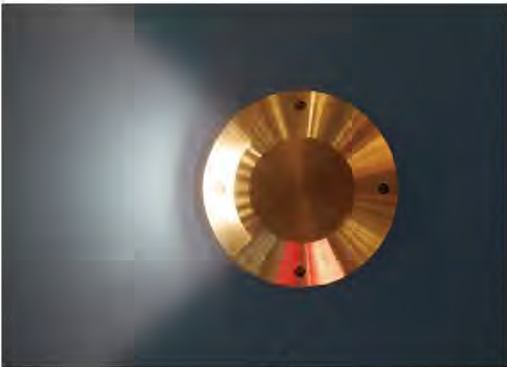

19178



19198



19178

220 ~ 240V-10W 8*1W Ra≥80 192Lm(3000K)

Class I IP67 kg 2.2 >5Nm



19198

220 ~ 240V-10W 8*1W Ra≥80 192Lm(3000K)


Class I IP67 kg 2.28 >5Nm




Stainless steel cover .Convex PC cover .High-pressure casting aluminum lighting body . ABS plastic housing .



19128



19138



19128

220 ~ 240V-5W 2*2W Ra≥80 96Lm(3000K)

Class I IP67 kg 1.28 3Nm




19138

220 ~ 240V-10W 4*2W Ra≥80 192Lm(3000K)


Class I IP67 kg 1.21 3Nm




High-pressure casting aluminium face ring and lighting body .Convex PC cover . ABS plastic housing .

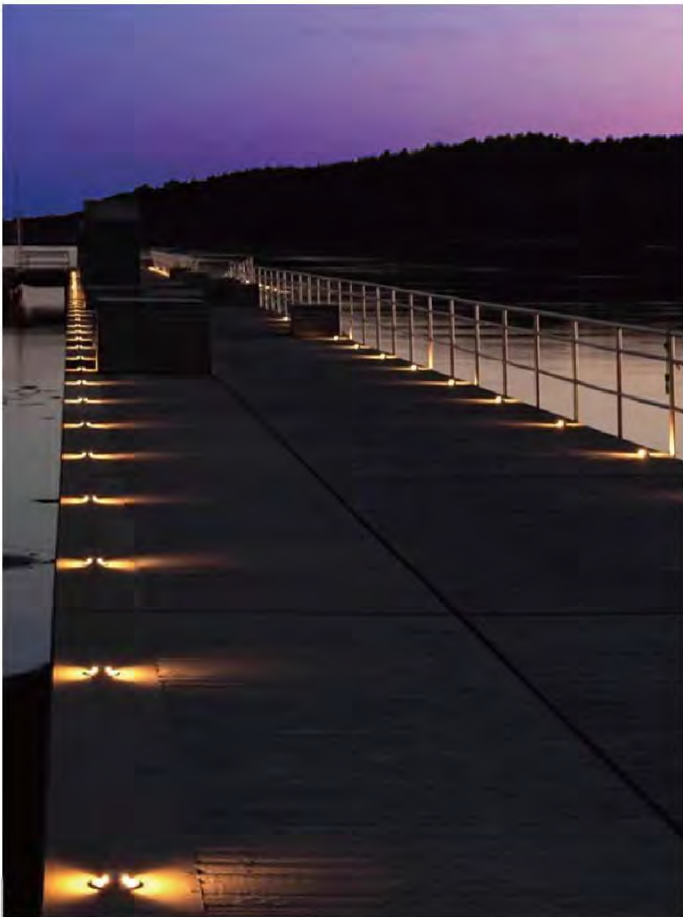

19148



19188



19148

220 ~ 240V-10W 8*1W Ra≥80 192Lm(3000K)

Class I IP67 kg 1.19 3Nm




19188

220 ~ 240V-10W 8*1W Ra≥80 192Lm(3000K)


Class I IP67 kg 1.18 3Nm



High-pressure casting aluminium face ring and lighting body .Convex PC cover . ABS plastic housing .

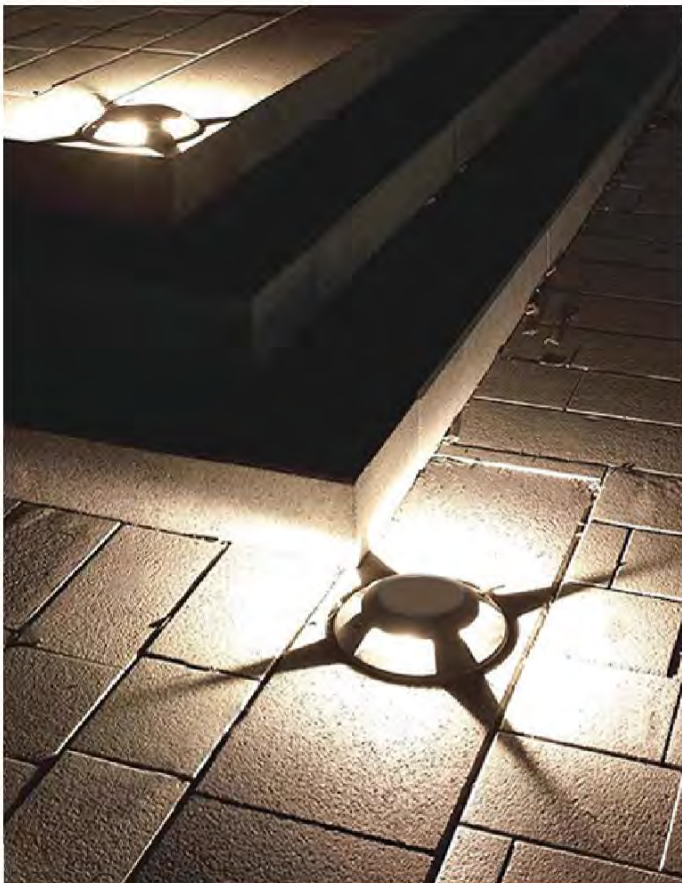

19040




19040

220 ~ 240V-1.9W 1*1W Ra≥80 27Lm(3000K)

Class I IP67 5Nm 0.87



19050




19050

220 ~ 240V-2.9W 2*1W Ra≥80 55Lm(3000K)

Class I IP67 5Nm 0.78



19090





19090

220 ~ 240V-5.7W 4*1W Ra≥80 110Lm(3000K)


Class I IP67 5Nm 0.69



Stainless steel cover .Convex PC cover .High-pressure casting aluminum lighting body . ABS plastic housing .

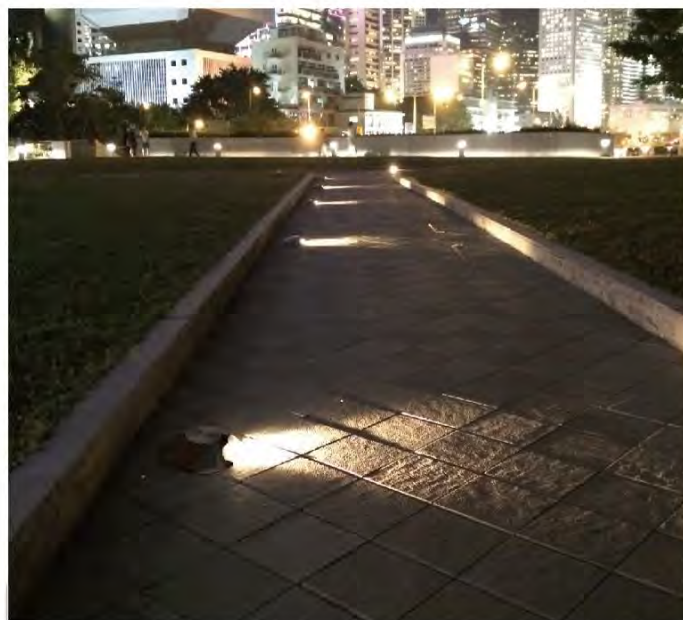

19048




19048

220 ~ 240V-1.9W 1*1W Ra≥80 27Lm(3000K)

Class I IP67 3Nm 0.47



19058




19058

220 ~ 240V-2.9W 2*1W Ra≥80 55Lm(3000K)

Class I IP67 3Nm 0.46



19068




19068

220 ~ 240V-5.7W 4*1W Ra≥80 110Lm(3000K)


Class I IP67 3Nm 0.45



Convex PC cover .High-pressure casting aluminum lighting body . ABS plastic housing .



83107



83107

220 ~ 240V-9W COB $Ra \geq 80$ 765Lm(3000K)

Class I IP65 kg 0.70


84607

220 ~ 240V-12.8W COB $Ra \geq 80$ 1088Lm(3000K)

Class I IP65 kg 1.41



84607



Stainless steel face ring . High-pressure casting aluminium lighting body .




80166



80166 80167(304面圈)

220 ~ 240V-15W COB Ra≥80 1330Lm(3000K)

Class I IP65 kg 0.75 / 0.8

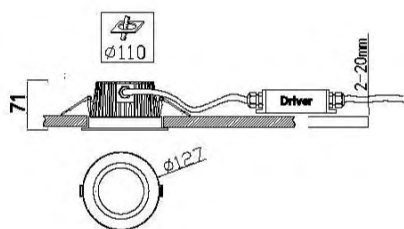


High-pressure casting aluminium lighting body (80166).
304 stainless steel face ring (80167).

80167




80166



80167



87606

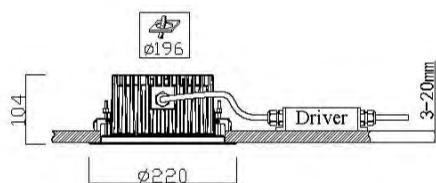

87606 87607

220 ~ 240V-30W COB Ra $\geq$ 80 2550Lm(3000K)



Class I



IP65



kg 2.6





kg 3.00




Stainless steel face ring . High-pressure casting aluminium lighting body .

87607

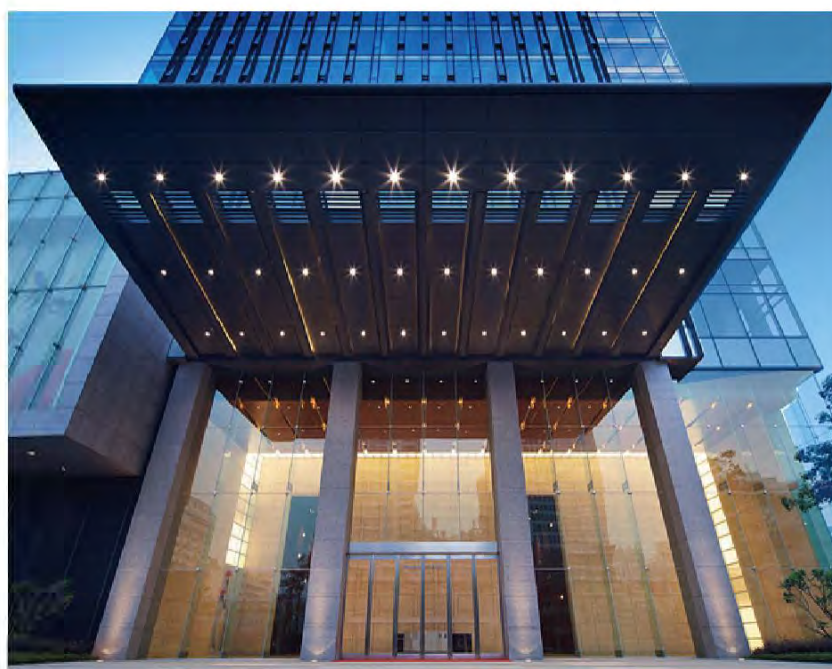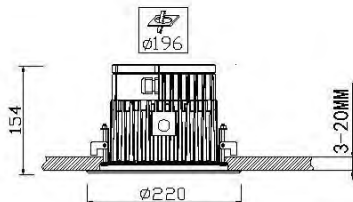

81707

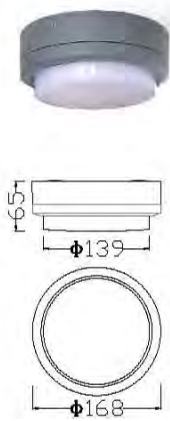

81707


220 ~ 240V-22W COB Ra≥80 1246Lm(3000K)

Class I IP65 0.9



High-pressure casting aluminium lighting body .PMMA lampshade.

81717

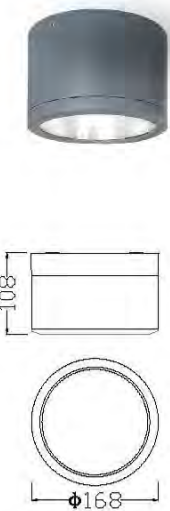

81717

220 ~ 240V-22W COB Ra≥80 1980Lm(3000K)


Class I IP65 1.15



High-pressure casting aluminium lighting body .



85407




85407

220 ~ 240V-9W COB Ra≥80 765Lm(3000K)

Class I IP54 1.08 kg



85507



85507

220 ~ 240V-15W COB Ra≥80 1275Lm(3000K)


Class I IP54 1.6 kg



aluminium lighting body



85700



85700

220 ~ 240V-15W COB-AR111 Ra $\geq$ 80 1275Lm(3000K)



 Class I
  IP65
  kg 2.43




85707

220 ~ 240V-30W COB Ra $\geq$ 80 2550Lm(3000K)

 Class I
  IP65
  kg 3.37



85707




Aluminium lighting body .



87307

220 ~ 240V-22W COB $Ra \geq 80$ 1870Lm(3000K)


 Class I
  IP54
  kg 2.35



High-pressure casting aluminium lighting body .



80606




80606

220 ~ 240V-6W COB $Ra \geq 80$ 520Lm(3000K)

Class I IP65 kg 0.70



80906



80906

220 ~ 240V-12.8W COB $Ra \geq 80$ 1088Lm(3000K)



Class I IP65 kg 1.48



Aluminum lighting body .



81207





81207

220 ~ 240V-15W COB Ra $\geq$ 80 1275Lm(3000K)

Class I IP65 1.48 kg



81507




81507

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

Class I IP65 2.48 kg



Aluminuim lighting body .


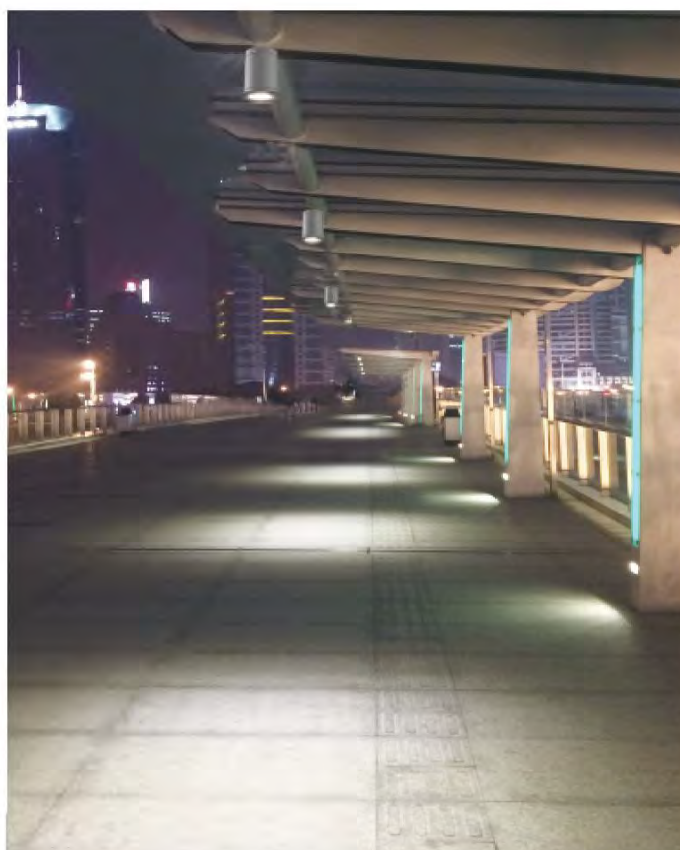





81907

220 ~ 240V-30W COB $Ra \geq 80$ 2550Lm (3000K)

Class I IP65 kg 3.76



Aluminium lighting body .

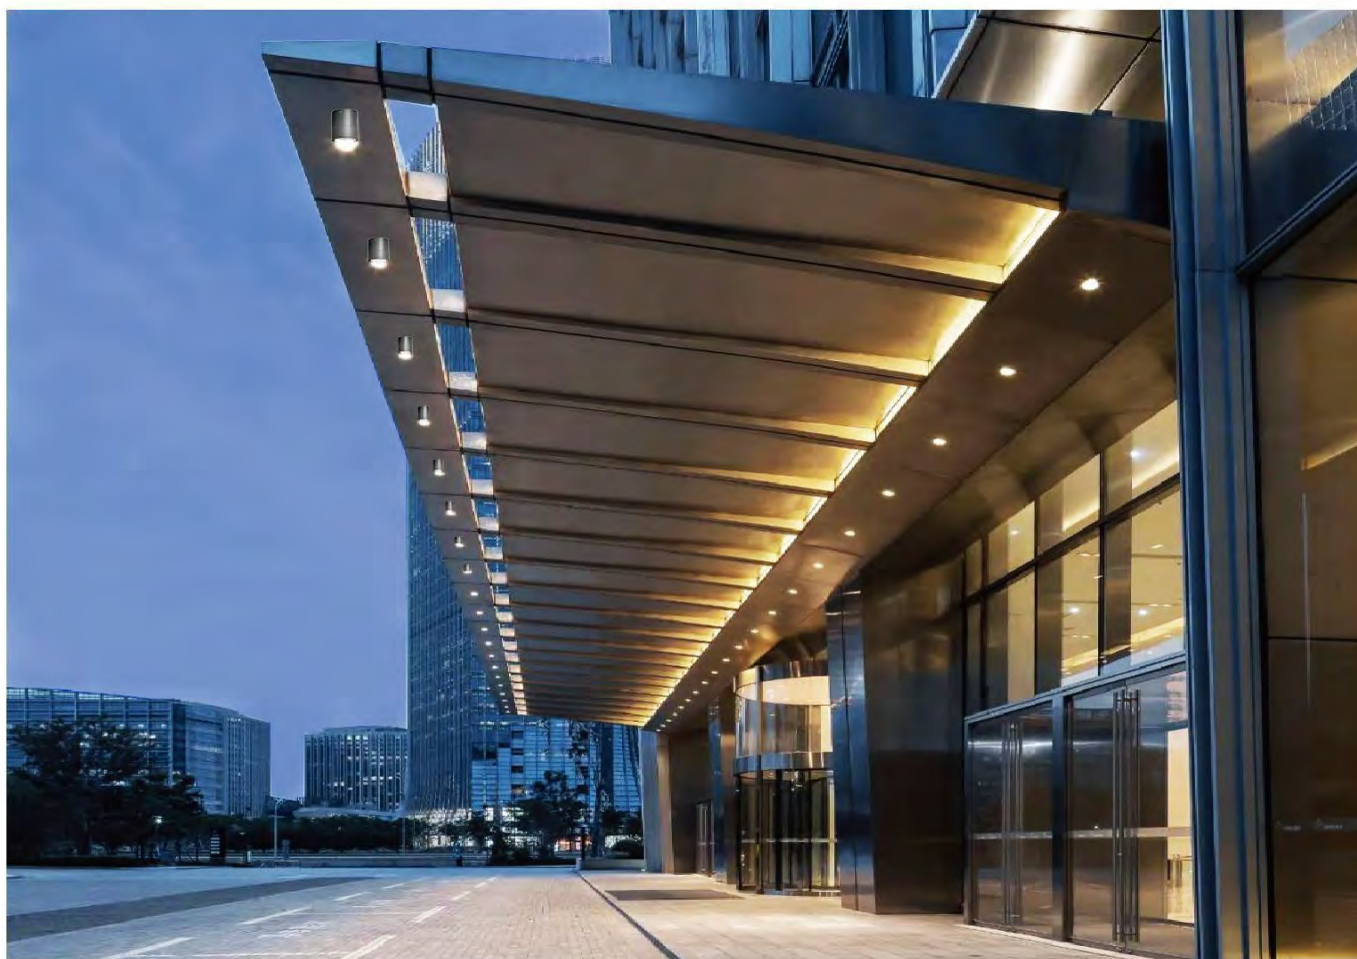

80217



80218



80217 80218

220 ~ 240V-9W COB $R_a \geq 80$ 765Lm(3000K)

Class I IP54 $\frac{kg}{1.05/1.15}$

80217;





80218;



Technical drawing

High-pressure casting aluminium lighting body .

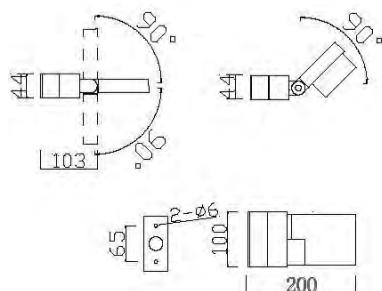

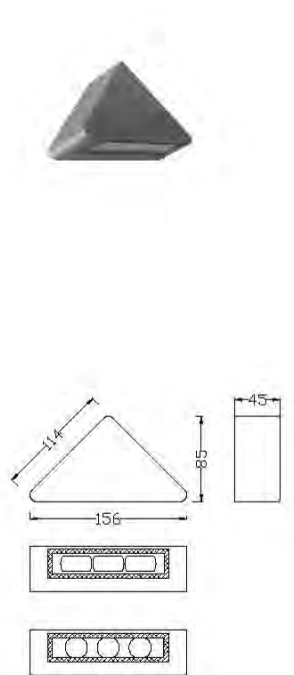


86128

220 ~ 240V-9W XPE2 Ra $\geq$ 80 630Lm(3000K)

⊕ Class I ⚡ IP65  0.45



Aluminium lighting body .Optional beam angles: 5*100° , 15° , 30° , 60°

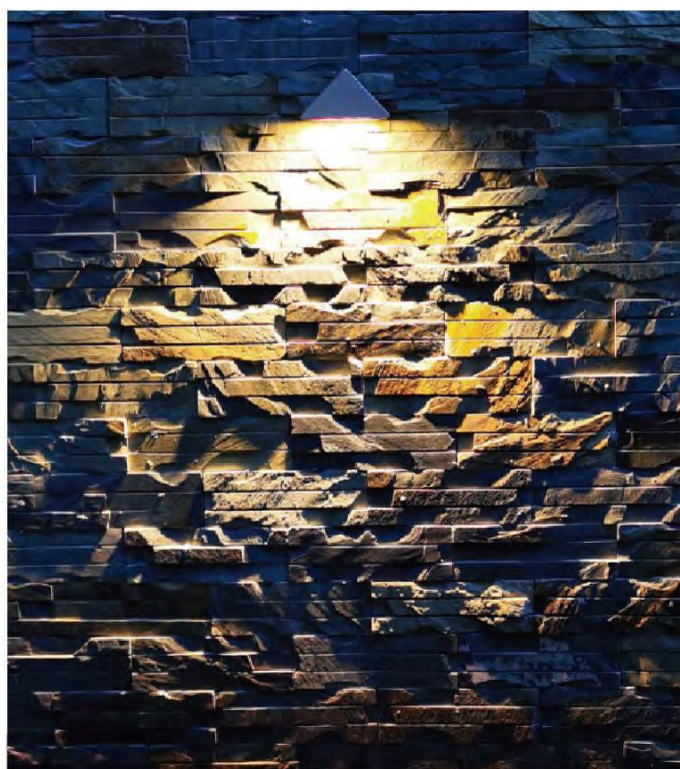




87817

220 ~ 240V-9W COB Ra $\geq$ 80 765Lm(3000K)


Class I IP65 kg 0.5

DC24V-9W C/W/RGB/RGBW DMX512

Class III IP65 kg 0.5



Aluminium lighting body .

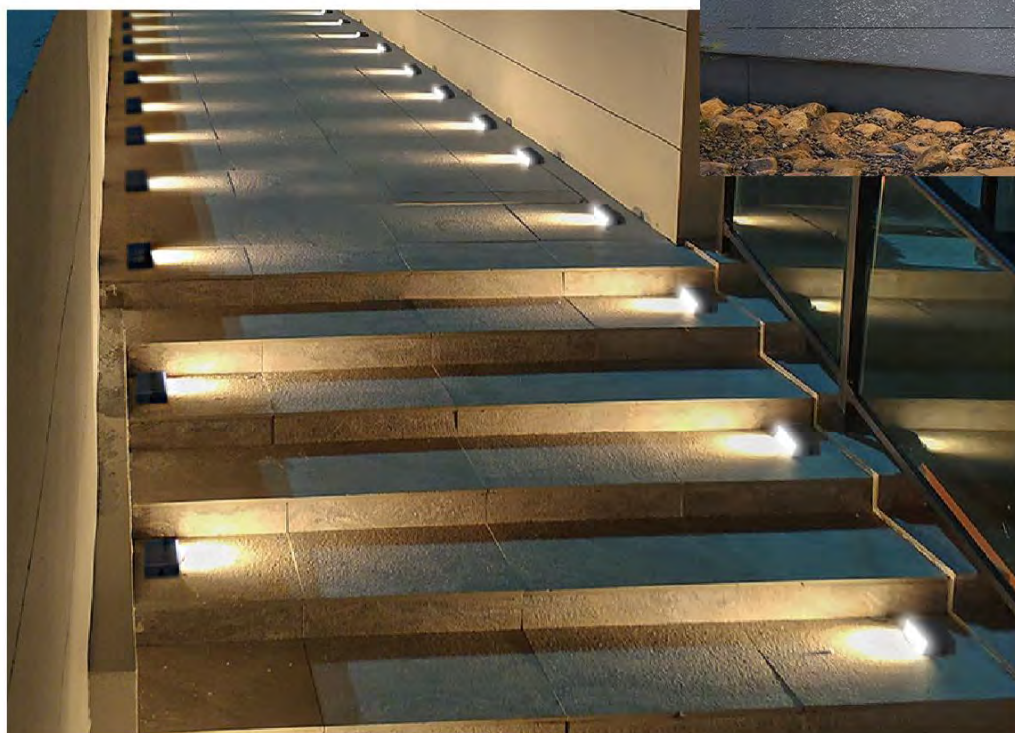



87717

220 ~ 240V-6.5W COB $Ra \geq 80$ 510Lm(3000K)

⊕ Class I ⚡ IP54  0.39





87718

220 ~ 240V-6W 2*3W $Ra \geq 80$ 252Lm(3000K)



⊕ Class I ⚡ IP54  0.39





High-pressure casting aluminium lighting body .87718 optional beam angles: 5° 、 15° 、 30° 、 60°

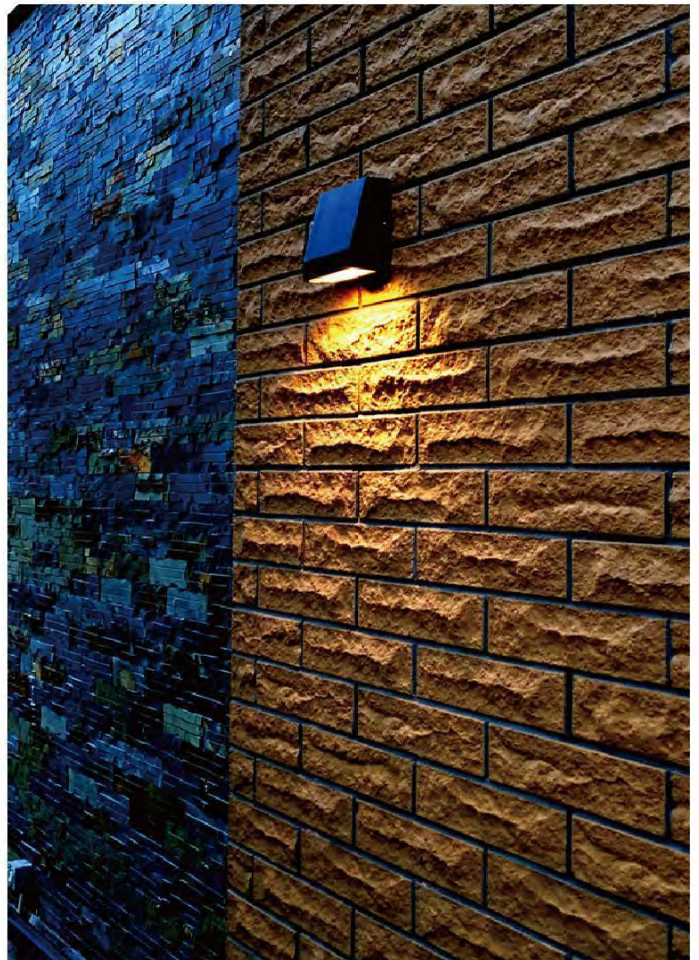

86910



86917



86910 86917

220 ~ 240V-15W COB Ra $\geq$ 80 1275Lm(3000K)

Class I IP65 kg 1.42 kg 1.47



High-pressure casting aluminium lighting body .

86910



86917






87017

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

Class I IP65 kg 1.81



High-pressure casting aluminium lighting body .

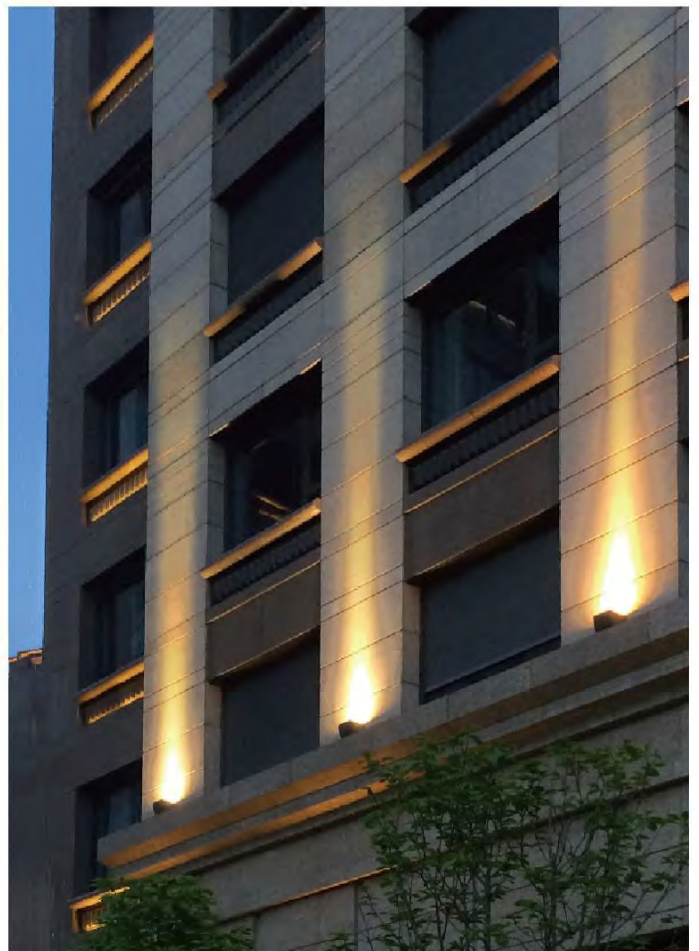



63207

220 ~ 240V-30W COB Ra $\geq$ 80 2550Lm(3000K)

63207.2

220 ~ 240V-2*22W COB Ra $\geq$ 80 37400Lm(3000K)



Class I




IP65



2,93





High-pressure casting aluminium lighting body .

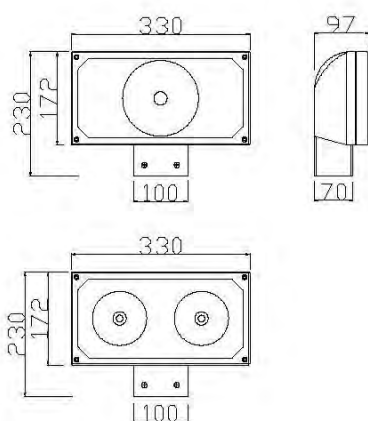

63207.2 (2个光源)

86030



86030 86037



220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

Class I IP65 kg 2.42

86030



86037




86037




High-pressure casting aluminium lighting body .



87110

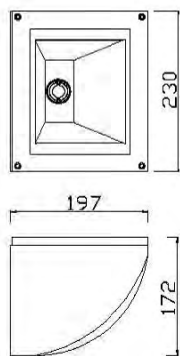

87117

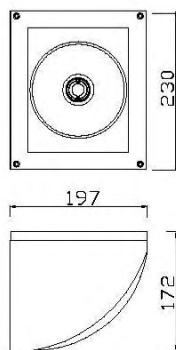

87110 87117

220 ~ 240V-30W COB Ra≥80 2550Lm(3000K)

Class I IP65 kg 2.90

87110




87117



High-pressure casting aluminium lighting body .






80117

220 ~ 240V-9W COB $Ra \geq 80$ 720Lm (3000K)

 Class I
  IP54
  kg 0.92



Aluminium lighting body .

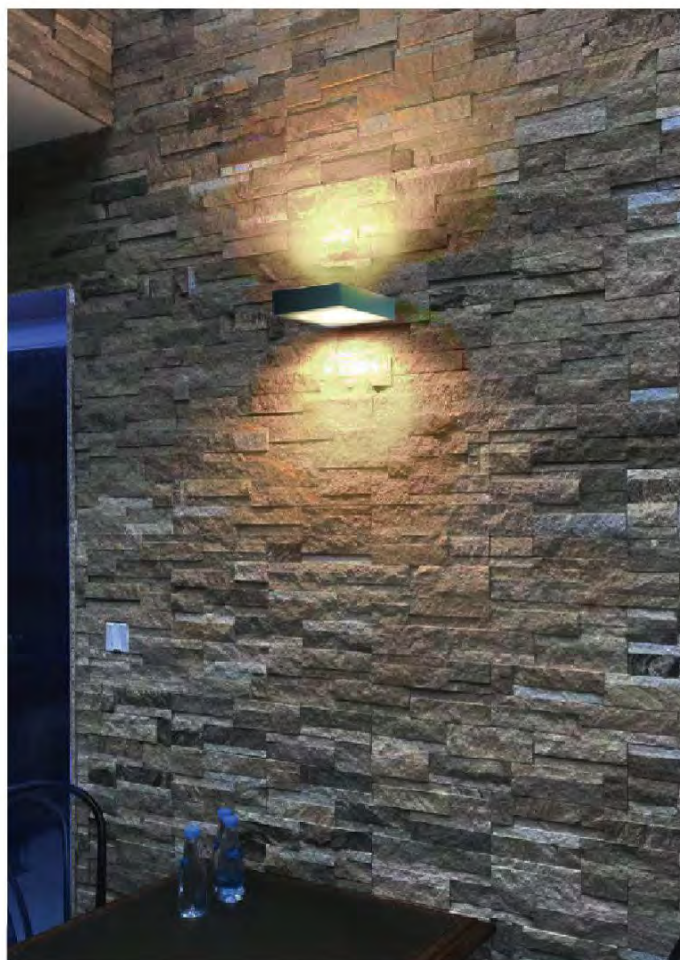




82217

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

 Class I
  IP65
  kg 2.70



Aluminium lighting body .



84617



84617 84637


220 ~ 240V-9W COB Ra $\geq$ 80 765Lm(3000K)

Class I IP65 kg 0.91




Aluminium lighting body .

84637

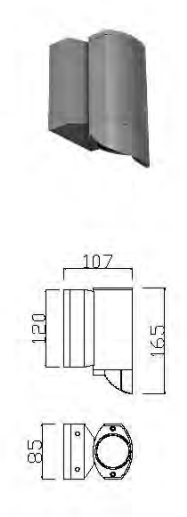

84627



84627 84647


220 ~ 240V-18W COB $Ra \geq 80$ 1530Lm (3000K)

Class I IP65 $\frac{kg}{1.07}$



Aluminium lighting body .

84647



85317




85317

220 ~ 240V-6.5W COB $Ra \geq 80$ 553Lm(3000K)

 Class I
  IP65
  kg 0.75




85327



85327



220 ~ 240V-2*6.5W COB $Ra \geq 80$ 1106Lm(3000K)

 Class I
  IP65
  kg 1.00



Aluminium lighting body .







85417

220 ~ 240V-9W COB $R_a \geq 80$ 765Lm(3000K)

Class I IP65 kg 1.09




85427

220 ~ 240V-18W COB $R_a \geq 80$ 1530Lm(3000K)


Class I IP65 kg 2.25



Aluminium lighting body .

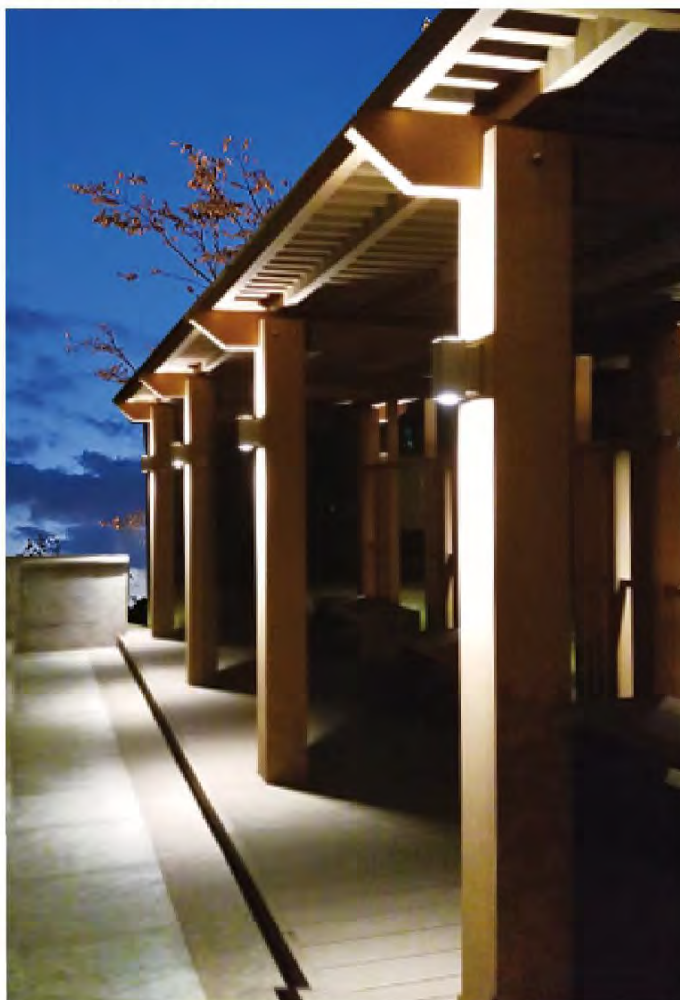

85517

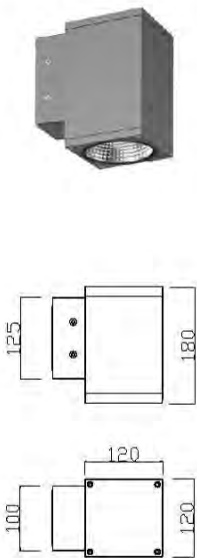

85517

220 ~ 240V-15W COB Ra≥80 1275Lm(3000K)

Class I IP65 1.42 kg




85527

220 ~ 240V-26W COB Ra≥80 2210Lm(3000K)

Class I IP65 2.93 kg




85527

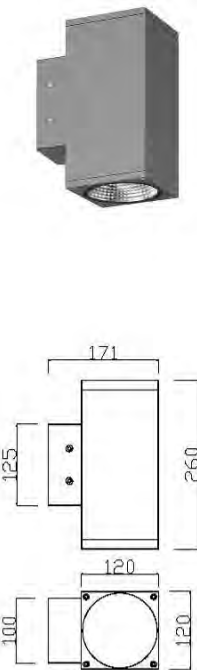


Aluminium lighting body .



85727




83027



85727

220 ~ 240V-30W COB Ra≥80 2550Lm(3000K)

Class I IP65 kg 5.30



Aluminium lighting body .

83027

220 ~ 240V-30W COB Ra≥80 2550Lm(3000K)


Class I IP54 kg 3.35



Aluminium lighting body .



80616

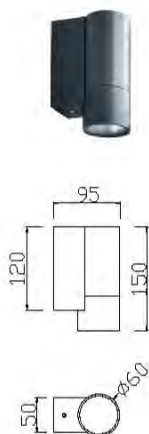


80616

220 ~ 240V-9W COB Ra≥80 745Lm(3000K)

Class I IP65 0.82 kg



80626

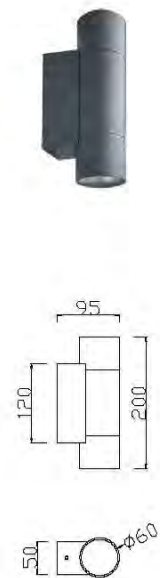

80626

220 ~ 240V-12.8W COB Ra≥80 1020Lm(3000K)



Class I IP65 1.04 kg



Aluminium lighting body .



80916





80916

220 ~ 240V-12.8W COB Ra $\geq$ 80 1020Lm(3000K)

Class I IP65 kg 1.09



80926



80926


220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

Class I IP65 kg 1.45



Aluminium lighting body .




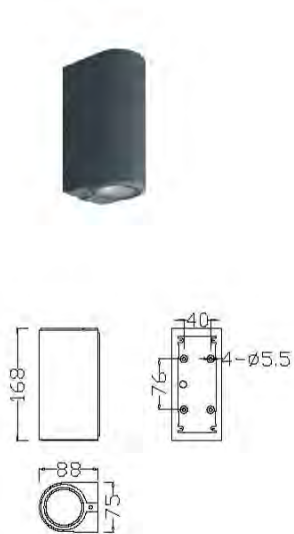

89117

220 ~ 240V-9W COB $Ra \geq 80$ 595Lm(3000K)

Class I IP54 kg 0.59



89127


220 ~ 240V-12.8W $Ra \geq 80$ 1088Lm(3000K)

Class I IP54 kg 0.88



High-pressure casting aluminium lighting body .



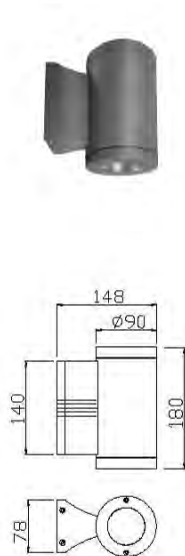

80917

220 ~ 240V-9W COB $Ra \geq 80$ 765Lm (3000K)

Class I IP54 $\frac{kg}{1.09}$



80927

220 ~ 240V-15W COB $Ra \geq 80$ 1275Lm (3000K)



Class I IP54 $\frac{kg}{1.35}$



Aluminium lighting body .



81217



81217

220 ~ 240V-15W COB Ra $\geq$ 80 1275Lm(3000K)

Class I IP54 kg 1.09





81227

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

Class I IP54 kg 1.88



81227



Aluminium lighting body .



81517




81517

220 ~ 240V-22W COB Ra≥80 1870Lm(3000K)

Class I IP54 2.12 kg



81527

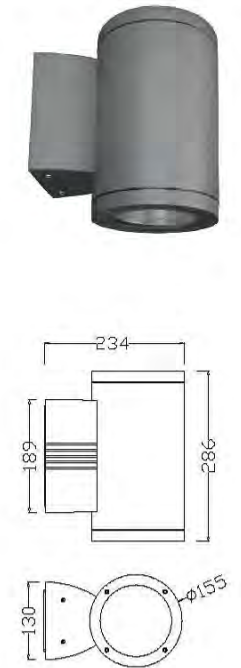

81527

220 ~ 240V-30W COB Ra≥80 2550Lm(3000K)


Class I IP65 3.95 kg



Aluminium lighting body .



81917

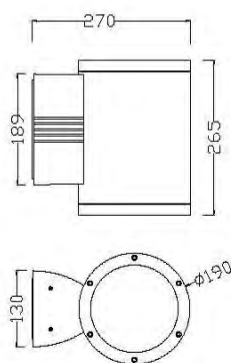

81917

220 ~ 240V-30W COB $R_a \geq 80$ 2550Lm (3000K)


Class I IP65 kg 3.95




81927

220 ~ 240V-60W COB $R_a \geq 80$ 5100Lm (3000K)

Class I IP65 kg 5.75




81927

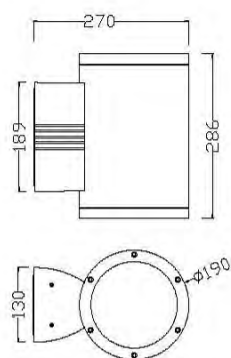

Aluminium lighting body .



55477



55477

220 ~ 240V-3.6W LED $Ra \geq 80$ 166Lm(3000K)


Class I IP54 0.2 kg

56177

220 ~ 240V-9W COB $Ra \geq 80$ 415Lm(3000K)

Class I IP54 0.75 kg


56177



High-pressure casting aluminium lighting body ABS plastic housing .



50128



50128

220 ~ 240V-3W SMD $Ra \geq 80$ 138Lm (3000K)


Class I IP65 kg 0.52

50238


220 ~ 240V-5W SMD $Ra \geq 80$ 230Lm (3000K)

Class I IP65 kg 0.74


50238



High-pressure casting aluminium lighting body ABS plastic housing .

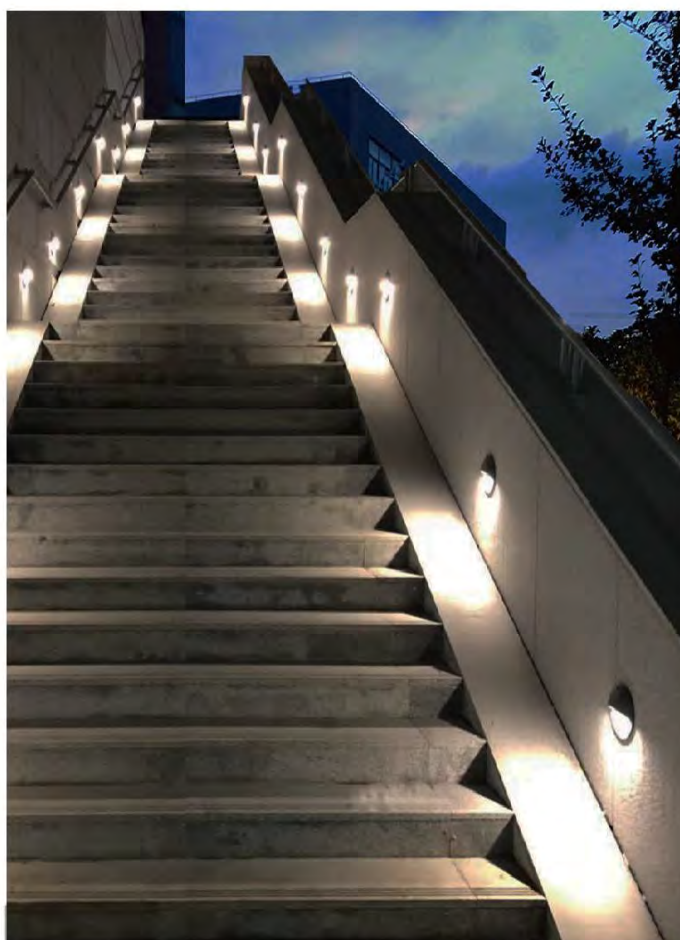

51208



51208

220 ~ 240V-6W LED Ra $\geq$ 80 420Lm(3000K)


Class I IP65 0.68 kg

53208


220 ~ 240V-8W LED Ra $\geq$ 80 560Lm(3000K)

Class I IP65 0.85 kg


53208

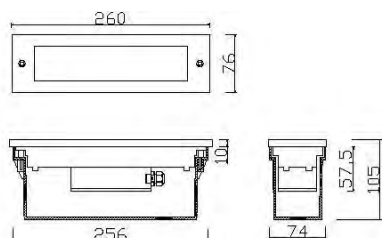

High-pressure casting aluminium lighting body ABS plastic housing .

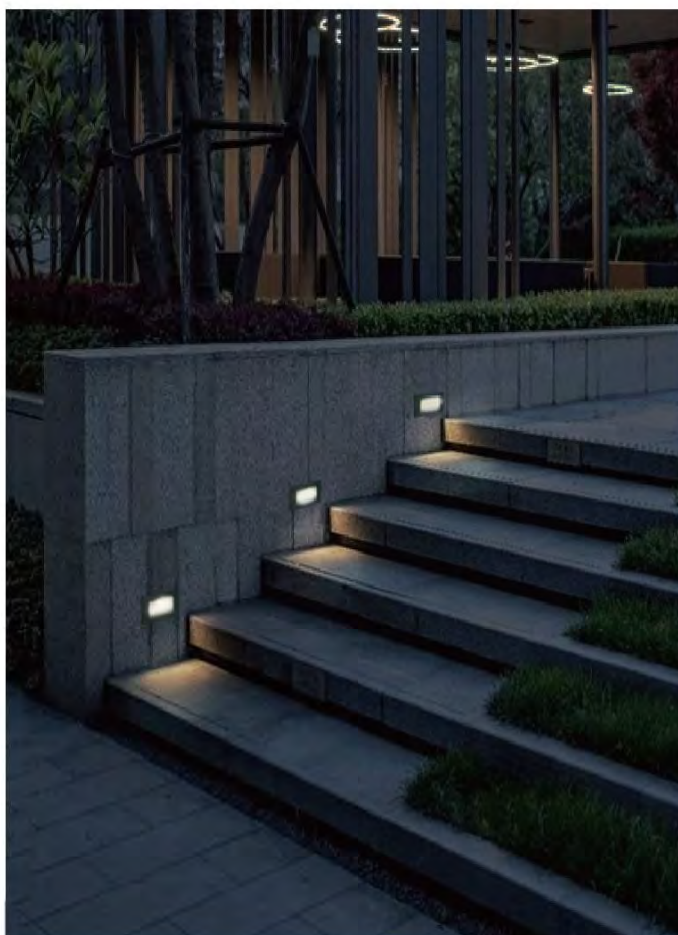

51218



51218

220 ~ 240V-6W LED $Ra \geq 80$ 180Lm(3000K)


 Class I  IP65  0.68 kg

53218


220 ~ 240V-8W LED $Ra \geq 80$ 240Lm(3000K)

 Class I  IP65  0.8 kg


53218

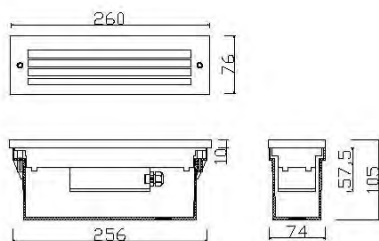

High-pressure casting aluminium lighting body ABS plastic housing .

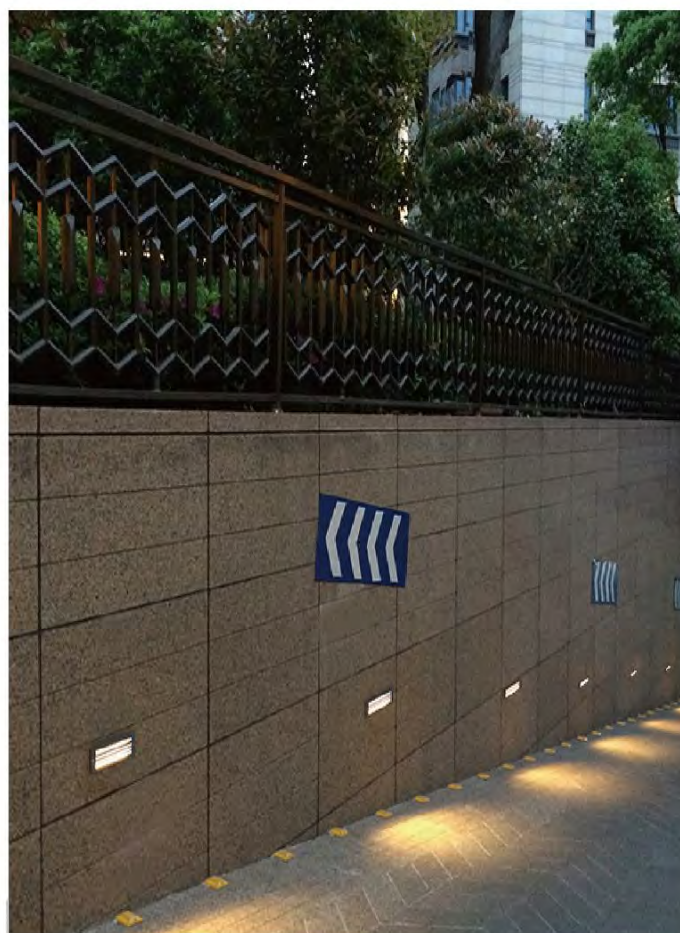

51248




51248

220 ~ 240V-6W LED Ra $\geq$ 80 240Lm(3000K)

Class I IP65 0.65 kg

53248

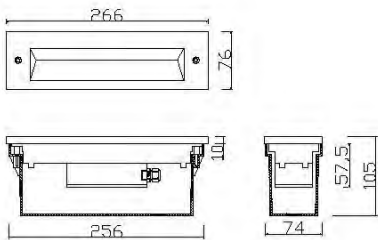


53248

220 ~ 240V-8W LED Ra $\geq$ 80 362Lm(3000K)

Class I IP65 1.02 kg

55218

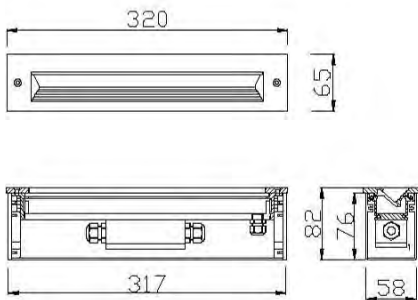

55218

220 ~ 240V-9W LED Ra $\geq$ 80 450Lm(3000K)


Class I IP65 1.05 kg



High-pressure casting aluminium lighting body ABS plastic housing .



51238



51238

220 ~ 240V-6W LED Ra $\geq$ 80 240Lm(3000K)


 Class I  IP65  1.02 kg

53238


220 ~ 240V-8W LED Ra $\geq$ 80 362Lm(3000K)

 Class I  IP65  1.22 kg


53238

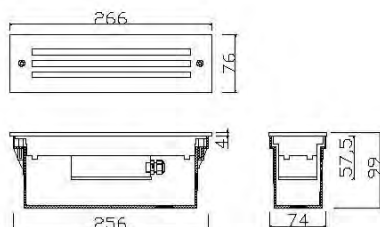

Stainless steel face ring . High-pressure casting aluminium lighting cover. ABS profile housing .

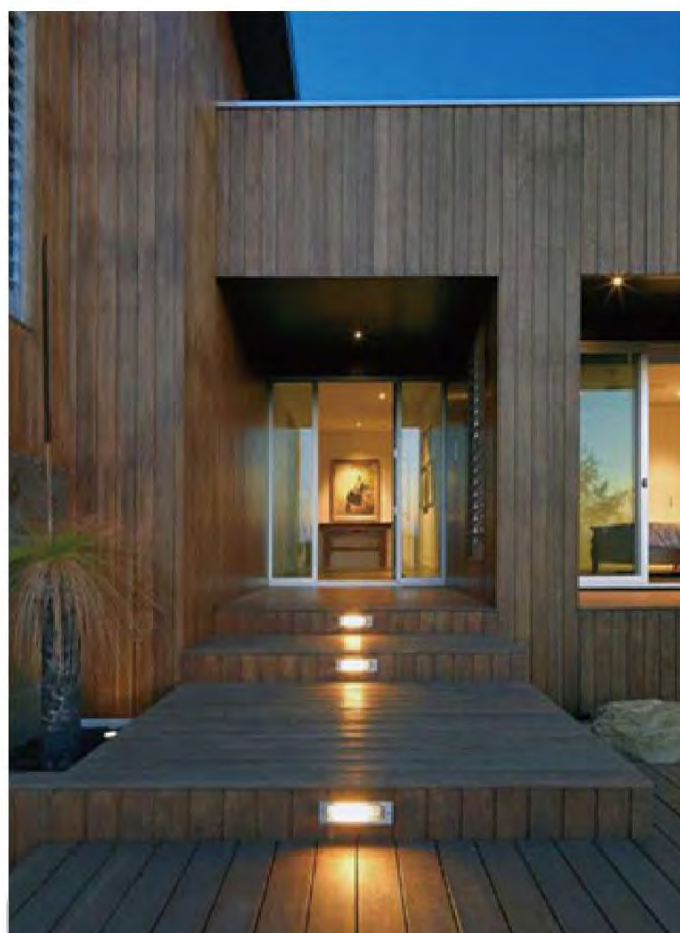

51258



51258

220 ~ 240V-6W COB $Ra \geq 80$ 362Lm(3000K)

Class I IP65 kg 0.7

56337

220 ~ 240V-9W COB $Ra \geq 80$ 415Lm(3000K)


Class I IP65 kg 0.88

56330

GU10 220V-5W PR16 

Class I IP65 kg 1.10


56337/56330



High-pressure casting aluminium lighting cover. ABS profile housing.



54978



54978

220 ~ 240V-1W SMD $Ra \geq 80$ 20Lm(3000K)


Class I IP54 kg 0.52

54968

220 ~ 240V-2W SMD $Ra \geq 80$ 40Lm(3000K)

Class I IP54 kg 0.81

54968




54958

220 ~ 240V-3W SMD $Ra \geq 80$ 60Lm(3000K)

Class I IP54 kg 1.08




54958



Stainless steel face ring .High-pressure casting aluminium lighting body .
High-pressure casting aluminium profile fixing box .



54878



54878

220 ~ 240V-1W SMD $Ra \geq 80$ 20Lm(3000K)


Class I IP54 $\frac{kg}{kg}$ 0.55

54868

220 ~ 240V-2W SMD $Ra \geq 80$ 40Lm(3000K)

Class I IP54 $\frac{kg}{kg}$ 0.84

54868




54858

220 ~ 240V-3W SMD $Ra \geq 80$ 60Lm(3000K)


Class I IP54 $\frac{kg}{kg}$ 1.12




54858



Stainless steel face ring .High-pressure casting aluminium lighting body .
High-pressure casting aluminium profile fixing box .

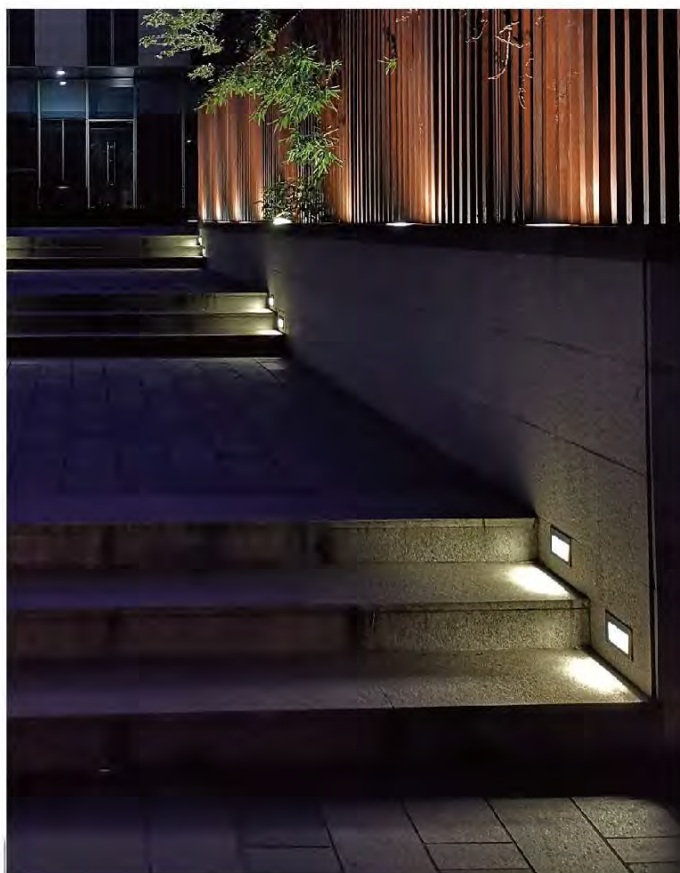

54478



54478

220 ~ 240V-1W SMD $Ra \geq 80$ 20Lm (3000K)


Class I IP54 $\frac{kg}{0.14}$

54468

220 ~ 240V-2W SMD $Ra \geq 80$ 40Lm (3000K)

Class I IP54 $\frac{kg}{0.26}$

54468




54458

220 ~ 240V-3W SMD $Ra \geq 80$ 60Lm (3000K)


Class I IP54 $\frac{kg}{0.38}$



54458



High-pressure casting aluminium lighting body .54478 ABS plastic housing .
54468/54458 Plating zinc housing .

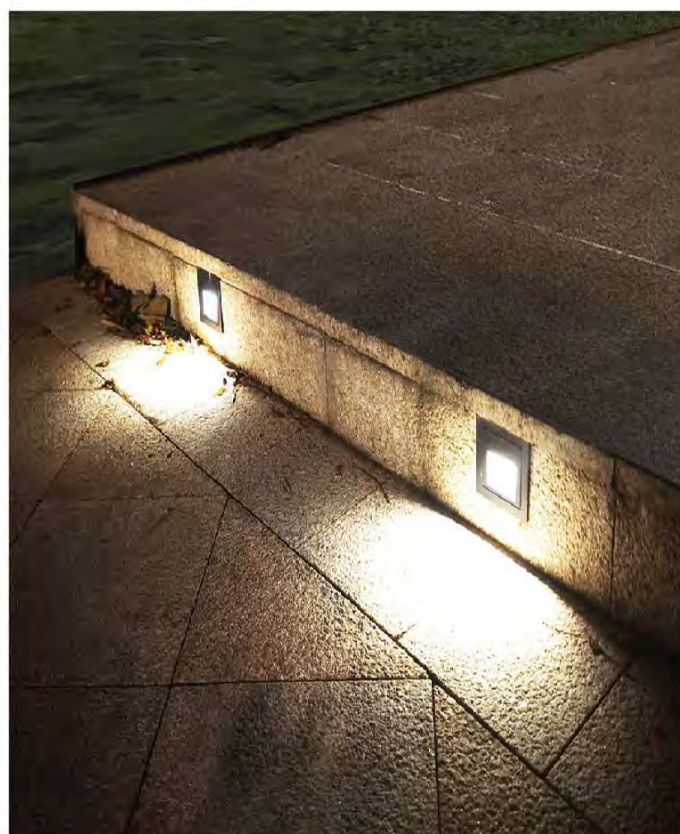




57417

220 ~ 240V-6.5W COB Ra $\geq$ 80 420Lm(3000K)

Class I IP54 kg 0.44



58267


220 ~ 240V-15W COB Ra $\geq$ 80 328Lm(3000K)

Class I IP54 kg 2.11



(58267)

High-pressure casting alum .ABS plastic hovsing .

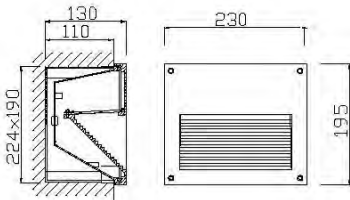



63808 (L-315mm)

220 ~ 240V-7.2W 6*1W Ra≥80 612Lm(3000K)

63818 (L-500mm)


220 ~ 240V-14W 12*1W Ra≥80 1190Lm(3000K)

63828 (L-890mm)

220 ~ 240V-22W 18*1W Ra≥80 1870Lm(3000K)

63838 (L-1000mm)

220 ~ 240V-29W 24*1W Ra≥80 2465Lm(3000K)

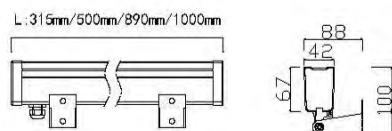

Class I IP65 kg 1.23/1.64/2.5/3.01

Square stripe lens angles:20x40°.Aluminium lighting body .Stainless steel nog .





63908 (L-315mm)

220 ~ 240V-14W 12*1W $Ra \geq 80$ 1190Lm(3000K)

63918 (L-500mm)


220 ~ 240V-29W 24*1W $Ra \geq 80$ 2465Lm(3000K)

63928 (L-890mm)

220 ~ 240V-43W 36*1W $Ra \geq 80$ 3655Lm(3000K)


63938 (L-1000mm)

220 ~ 240V-58W 48*1W $Ra \geq 80$ 4930Lm(3000K)

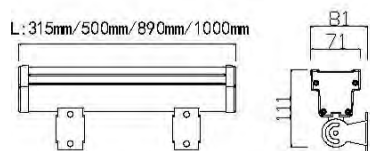


Class I IP65 kg 1.95/2.52/3.73/4.07

Square stripe lens angles:20x40°.Aluminium lighting body .Stainless steel nog .

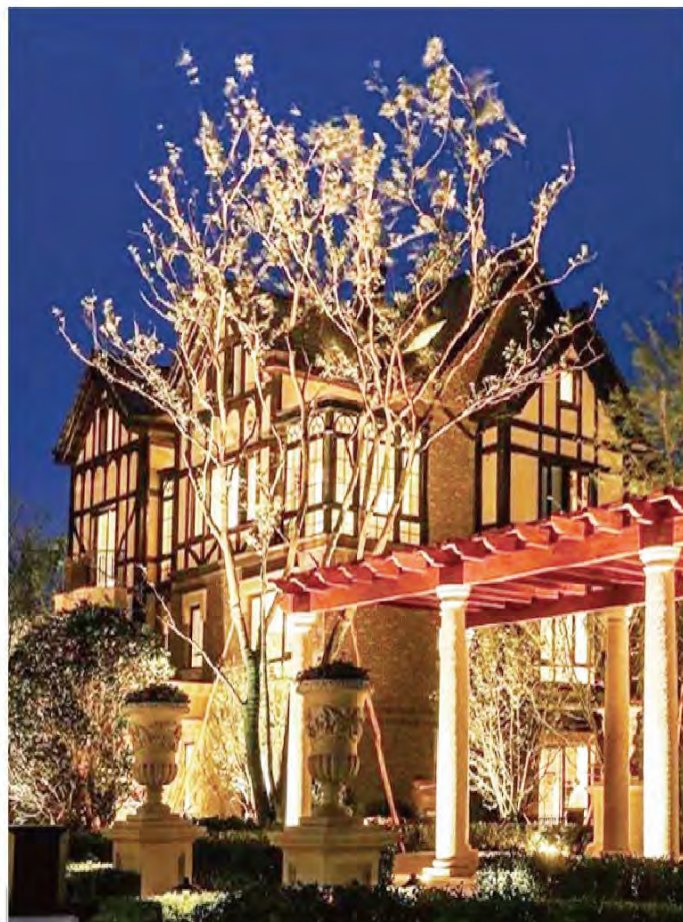

68120



68120

220 ~ 240V-25W SMD Ra $\geq$ 80 1725Lm(3000K)


Class I IP65 $\frac{kg}{3.1}$

68140

220 ~ 240V-50W SMD Ra $\geq$ 80 3520Lm(3000K)

Class I IP65 $\frac{kg}{6.5}$

68140

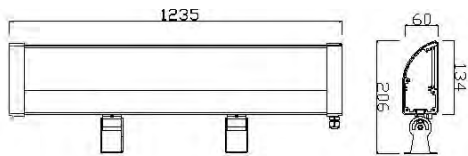

Optional DALI DIMA ,aluminium lighting body ,Stainless steel nog .



69717



69717 69727





220 ~ 240V-15W COB Ra $\geq$ 80 1200Lm(3000K)

Class I IP65 kg 1.3 IK06



69727

High-pressure casting aluminium lighting body .Nylon (PA6) Spike

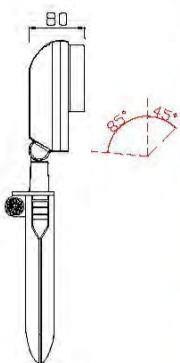

69817



69817 69827



220 ~ 240V-30W COB $Ra \geq 80$ 2550Lm(3000K)

Class I IP65 $\frac{kg}{L}$ 1.75/1.55 IK06



High-pressure casting aluminium lighting body .Aluminum alloy Spike

69827

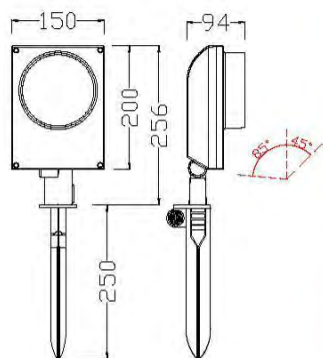

69917



69917 69927

220 ~ 240V-45W COB Ra $\geq$ 80 3825Lm(3000K)





Class I IP65 kg 2.85/2.6 IK06



69927



High-pressure casting aluminium lighting body .Aluminum alloy Spike

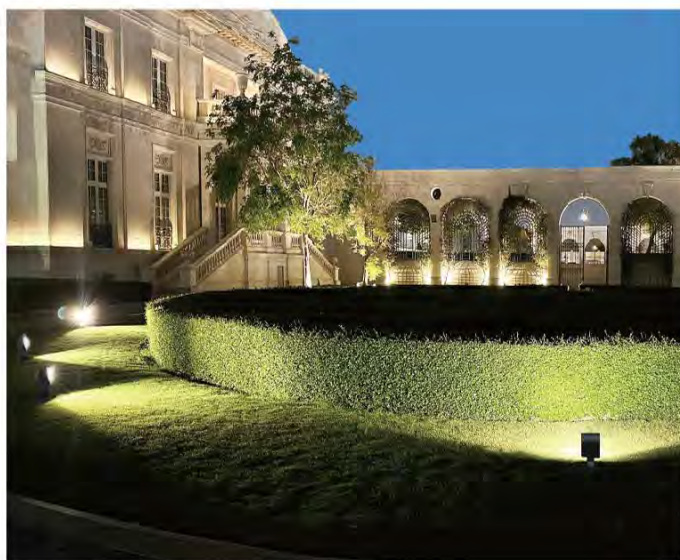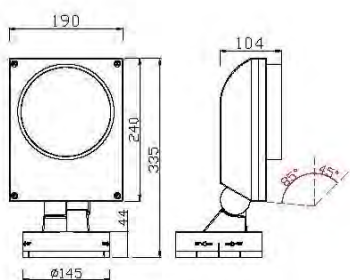

67017



67017 67027

220 ~ 240V-60W COB $Ra \geq 80$ 5100Lm(3000K)

220 ~ 240V-80W COB $Ra \geq 80$ 6800Lm(3000K)





Class I IP65 3.8/3.6 kg IK06



67027



High-pressure casting aluminium lighting body .Aluminum alloy Spike



60517



60517 60527

220 ~ 240V-9W COB $Ra \geq 80$ 765Lm(3000K)



Class I IP65 kg 0.82 kg 0.78 IK06



60527





High-pressure casting aluminium lighting body .Nylon (PA6) Spike

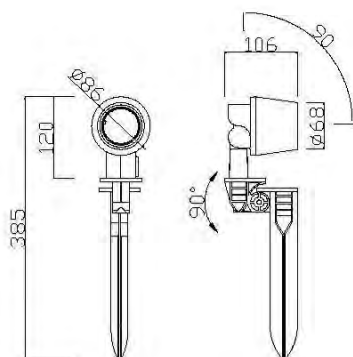

60617



60627

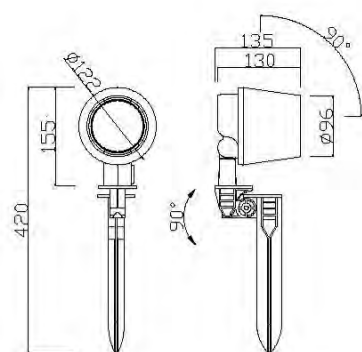

60617 60627

220 ~ 240V-15W COB Ra $\geq$ 80 1275Lm(3000K)

Class I IP65 kg 1.5/1.46 IK06



High-pressure casting aluminium lighting body .Nylon (PA6) Spike



60717



60717 60727

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

220 ~ 240V-30W COB Ra $\geq$ 80 2550Lm(3000K)




Class I IP65 kg 2.66 kg 2.56 IK06



60727



High-pressure casting aluminium lighting body .Nylon (PA6) Spike

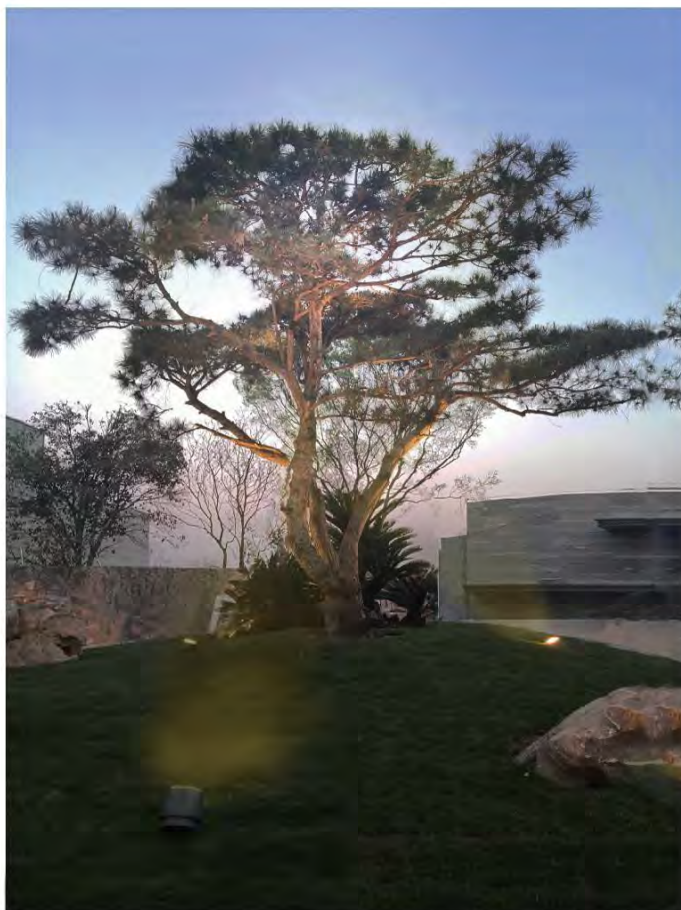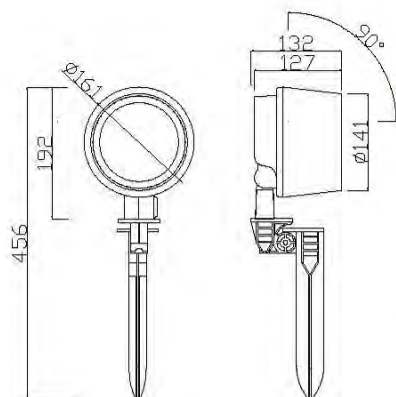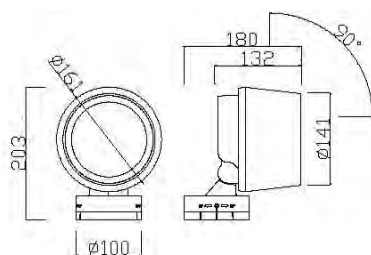

60817



60817 60827

220 ~ 240V-45W COB $Ra \geq 80$ 3825Lm(3000K)

220 ~ 240V-60W COB $Ra \geq 80$ 4930Lm(3000K)






Class I IP65 $\frac{kg}{3.82}$ IK06




60827



High-pressure casting aluminium lighting body .Version comes with build in temperature detector.Power would decrease by 50% when internal temperature is above 75°C and then recover to normal when temperature decrease .




68218




68218

220 ~ 240V-5W 5050LED Ra $\geq$ 80 260Lm(3000K)

Class I IP65 kg 0.46 IK06



68417




68417

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

Class I IP65 kg 1.65 IK06



68617

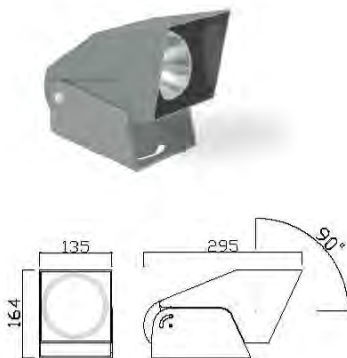


68617

220 ~ 240V-45W COB Ra $\geq$ 80 3825Lm(3000K)

Class I IP65 kg 3.48 IK06



65218



65218

DC24V-5W 2*2W $Ra \geq 80$ 300Lm(3000K)


Class III IP65 0.3 kg IK06

65228

DC24V-10W 4*2W $Ra \geq 80$ 600Lm(3000K)

Class III IP65 0.5 kg IK06

65228

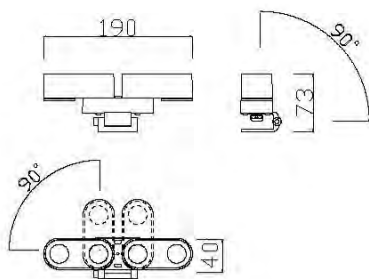

Optional beam angles: 5°、8°、15°、30°、60°、10*60°. High-pressure casting aluminium lighting body. Aluminum alloy bracket.



65208

DC24V-24W 20*1W $Ra \geq 80$ 2040Lm(3000K)



Class III



IP65






kg 2.45


IK06



Optional beam angles: 5°, 8°, 15°, 30°, 60°, 10*60°. High-pressure casting aluminium lighting body. Max 40PCS(DC24-80W)

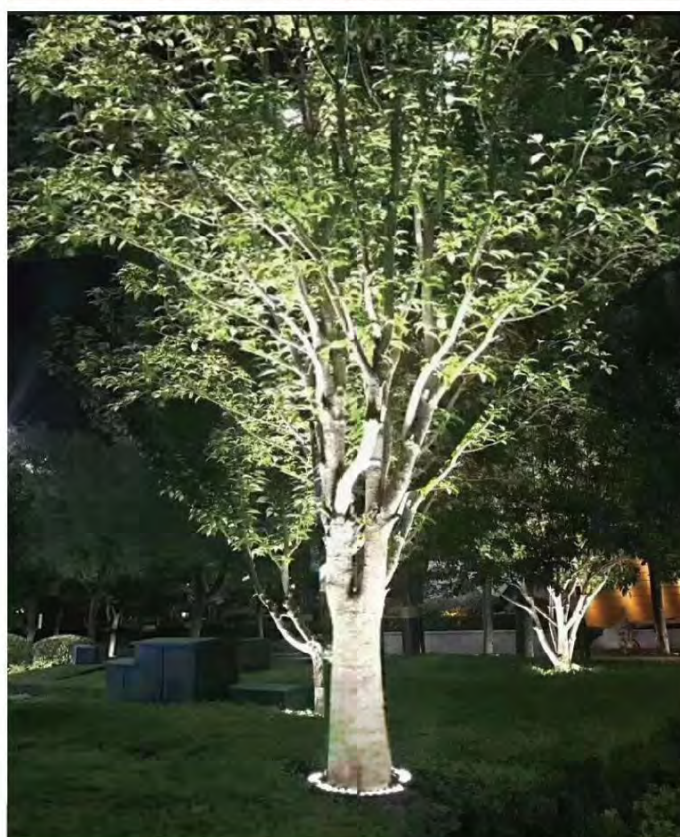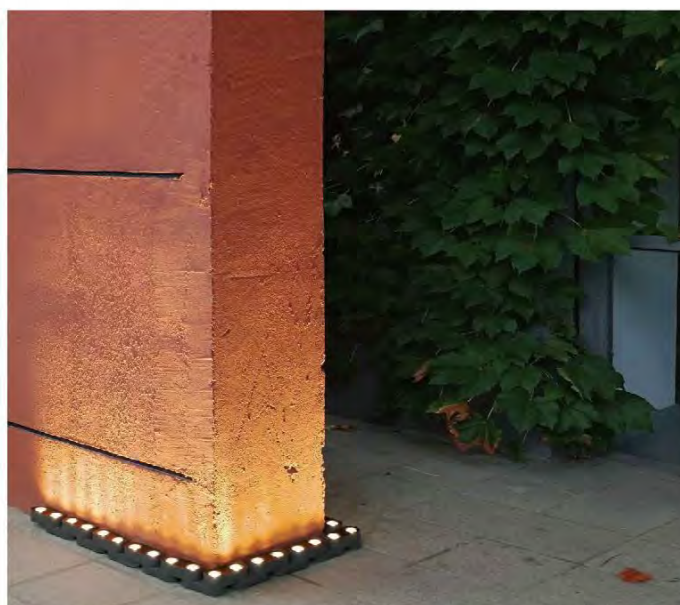

69218




69218 69238


220 ~ 240V-5W CREE5050 Ra $\geq$ 80 260Lm(3000K)

24VDC-5W CREE5050 Ra $\geq$ 80 260Lm(3000K)


IP65  0.36 IK06




69238




casting aluminium lighting body .304 stainless steel support .

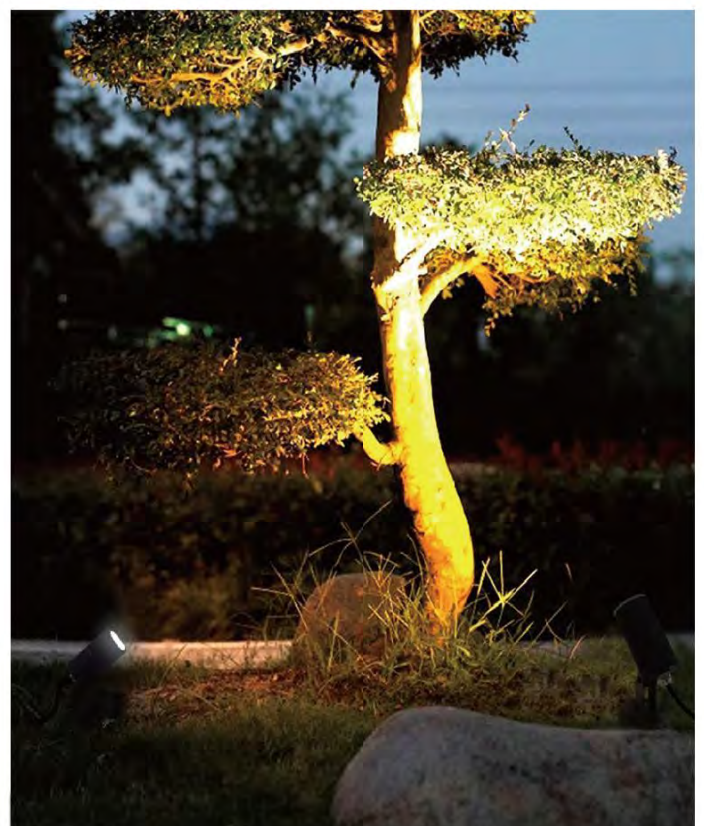


69217




69237



69227

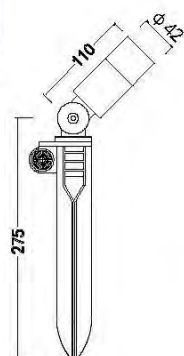

69247

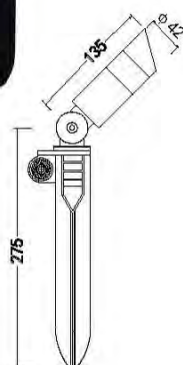

69217 69227 69237 69247

220 ~ 240V-6.5W COB Ra $\geq$ 80 520Lm(3000K)

24VDC-6.5W COB Ra $\geq$ 80 520Lm(3000K)



IP65



0.47

IK06



12°



24°



36°




60°


aluminium lighting body .Nylon (PA6) Spike .




69317




69337



69327



69347



69317 69327 69337 69347

220 ~ 240V-9W COB Ra $\geq$ 80 765Lm(3000K)


Class I IP65 IK06 kg 0.88/0.45/0.92/0.49




aluminium lighting body .Nylon (PA6) Spike .



69417



69427



69417 69427

220 ~ 240V-12.8W COB $Ra \geq 80$ 1020Lm(3000K)


Class I IP65 $\frac{kg}{1.47/1.13}$ IK06




High-pressure casting aluminium lighting body .Nylon (PA6) Spike




64617




64637



64627



64647




64617 64627 64637 64647


220 ~ 240V-9W COB $Ra \geq 80$ 765Lm(3000K)

220 ~ 240V-12.8W COB $Ra \geq 80$ 1088Lm(3000K)


Class I IP65 IK06 $\frac{1}{kg}$ 1.10/0.81/1.13/0.85



aluminium lighting body .Nylon (PA6) Spike .

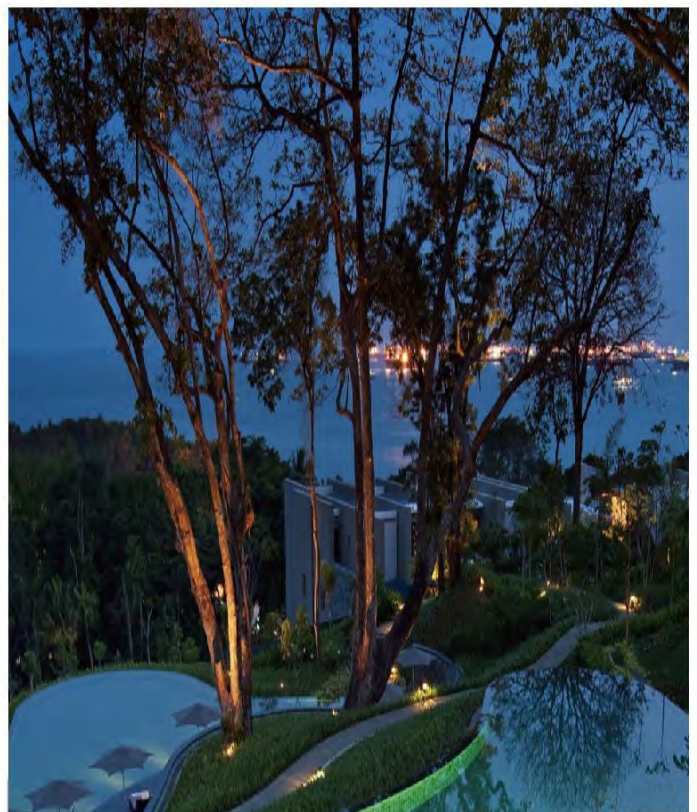

60123/60129



60123

E27 220V-7W PAR20 490Lm(3000K)


60129

220V-6.5W COB-AR80 490Lm(3000K)

Class I IP65 1.31 kg IK06



60223/60229



60223

E27 220V-12W PAR30 800Lm(3000k)

60229

220V-12.8W COB-AR111 960Lm(3000k)


Class I IP65 1.19 kg IK06



High-pressure casting aluminium lighting body .Nylon (PA6) Spike



60147




60147

220 ~ 240V-15W COB Ra $\geq$ 80 1050Lm(3000K)

Class I IP65 1.61 kg IK06



60237



60237

220 ~ 240V-22W COB Ra $\geq$ 80 1540Lm(3000K)


Class I IP65 2.08 kg IK06



High-pressure casting aluminium lighting body .



60337



60337


220 ~ 240V-45W COB $R_a \geq 80$ 3825Lm (3000K)

Class I IP65 2.25 kg IK06

60347


200 ~ 240V-38W COB $R_a \geq 80$ 3230Lm (3000K)

Class I IP65 1.98 kg




High-pressure casting aluminium lighting body .

60347




31637




31637

220 ~ 240V-9W COB $Ra \geq 80$ 765Lm(3000K)

Class I IP65 kg 0.84 IK06



31737



31737

220 ~ 240V-30W COB $Ra \geq 80$


Class I IP65 kg 1.96 IK06



High-pressure casting aluminium lighting body



32127




32127

220 ~ 240V-9W COB $Ra \geq 80$ 765Lm(3000K)

Class I IP65 kg 0.9 IK06



32027



32027

220 ~ 240V-15W COB $Ra \geq 80$ 1275Lm(3000K)

Class I IP65 kg 1.01 IK06



High-pressure casting aluminium lighting body .Nylon (PA6) Spike



66310



66317



66310 66317

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)



Class I



IP65




kg 2.15 IK06


66310



High-pressure casting aluminium lighting body .

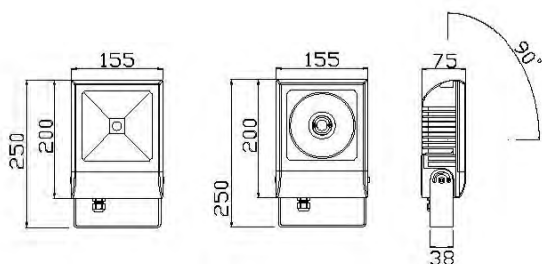


62637




62637

220 ~ 240V-9W COB Ra $\geq$ 80 765Lm(3000K)

Class I IP65 0.56 kg IK06



62737

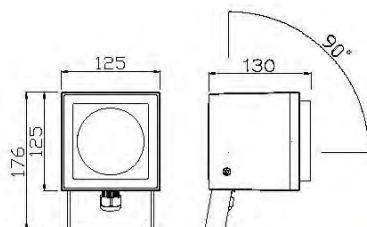

62737

220 ~ 240V-22W COB Ra $\geq$ 80 1870Lm(3000K)

Class I IP65 1.02 kg IK06



High-pressure casting aluminium lighting body .






69147

110 ~ 240V-45W COB $R_a \geq 80$ 4433Lm(3000K)

Class I IP65 **kg** 4.04 IK06

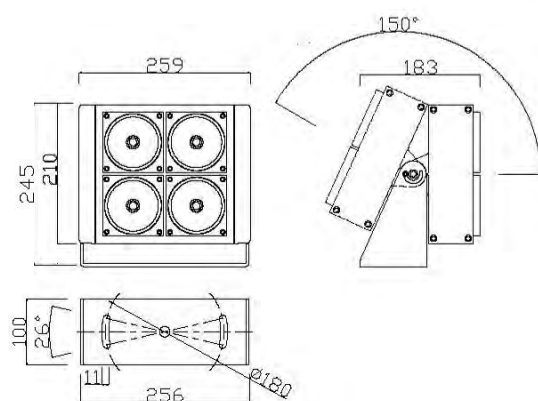


aluminium lighting body .



68717

220 ~ 240V-60W COB $R_a \geq 80$ 5100Lm(3000K)

Class I IP65 **kg** 7.50 IK06

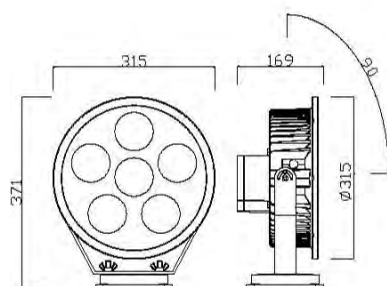

High-pressure casting aluminium lighting body .




27337

220 ~ 240V-30W COB Ra $\geq$ 80 2550Lm (3000K)

220 ~ 240V-38W COB Ra $\geq$ 80 3230Lm (3000K)

 Class I
  IP65
  3.55 kg
  IK06

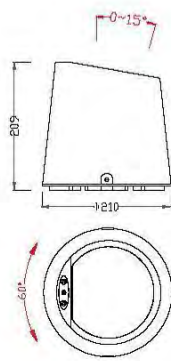

High-pressure casting aluminium lighting body .





95118 (L-300mm)

24VDC-6W 6*1W $Ra \geq 80$ 610Lm(3000K)

Class III IP68...3m  0.98

95128 (L-500mm)


24VDC-12W 12*1W $Ra \geq 80$ 1120Lm(3000K)

Class III IP68...3m  1.70

95138 (L-1000mm)


24VDC-24W 24*1W $Ra \geq 80$ 2320Lm(3000K)

Class III IP68...3m  2.86

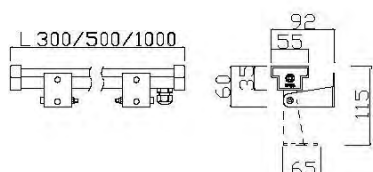

Stainless steel .Compatible with 0-24V constantvoltage dimming. 0  24V

Please light the whole lamp immersion water,
dehydration test lights do not exceed 10 minutes

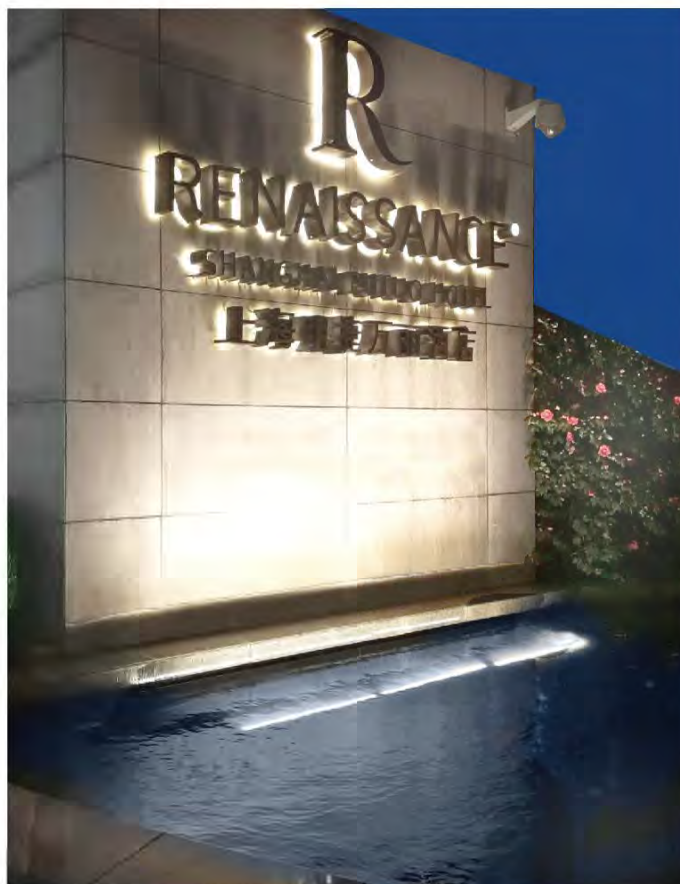

96118


24VDC-11W 3*3W Ra $\geq$ 80 540Lm(3000K)

Class III IP68...3m  1.6





Stainless steel .ABS plastic housing .

Please light the whole lamp immersion water,
dehydration test lights do not exceed 10 minutes



93228



93228 93258

24VDC-6*1W Ra≥80 600Lm(3000K)

Class III IP68...3m kg 1.35




304Stainless steel .




dehydration test lights do not exceed 10 minutes

93258



93428

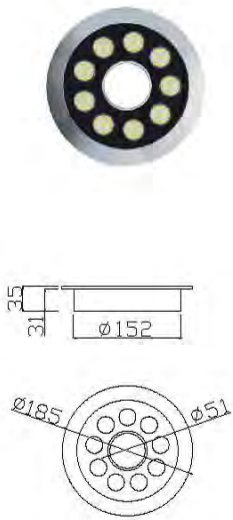

93428 93458

24VDC-11W 9*1W Ra≥80 990Lm(3000K)


Class III IP68...3m kg 3.15




304Stainless steel .

dehydration test lights do not exceed 10 minutes


93458

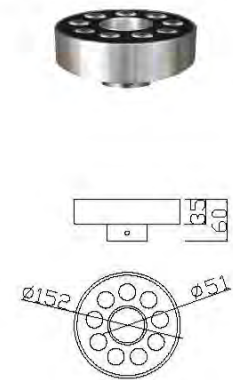

94218



94418



94218

24VDC-6*1W Ra $\geq$ 80 548Lm(3000K)

Class III IP68...3m kg 0.90

94418

24VDC-12*1W Ra $\geq$ 80 1160Lm(3000K)

Class III IP68...3m kg 1.39




304Stainless steel . ABS plastic housing . Compatible with 0-24V constant voltage dimming. 0  24V

Please light the whole lamp immersion water,
dehydration test lights do not exceed 10 minutes



94228

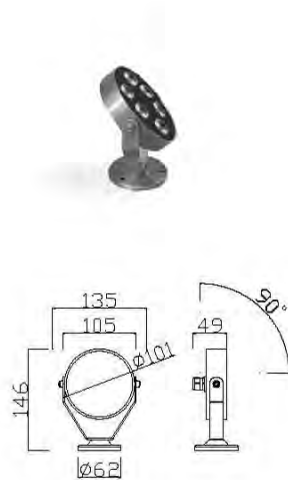

94228

24VDC-6*1W Ra $\geq$ 80 548Lm(3000K)

Class III IP68...3m 0.90 kg


94428

24VDC-12*1W Ra $\geq$ 80 1160Lm(3000K)

Class III IP68...3m 1.39 kg



94428

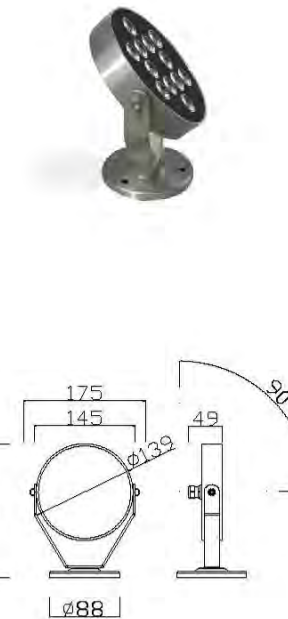

304Stainless steel . ABS plastic housing . Compatible with 0-24V constant voltage dimming. 0 24V

Please light the whole lamp immersion water,
dehydration test lights do not exceed 10 minutes

